



نوران

NOORAN

Magnetic Brass Multi Track Light



## Magnetic **Brass** Multi Track Light

---

Nooran lighting





Page 7

Page 8

Page 9



Page 10

Page 11

Page 12



Page 13

Page 14

Page 15



Page 16

Page 17

Page 18


Page 19



Page 20

Page 21

# Installation exploded view

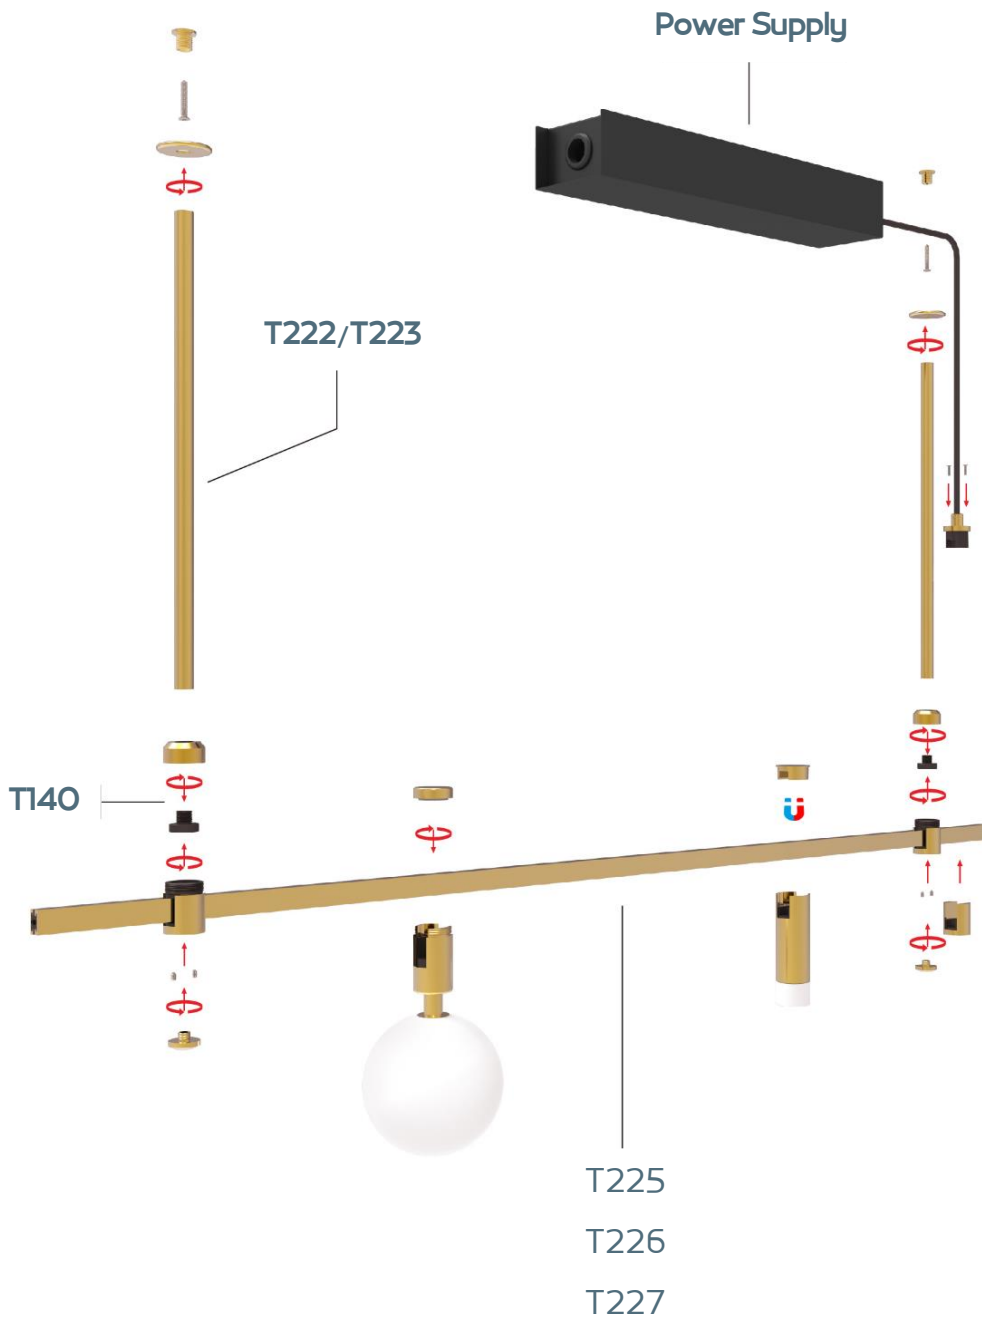


# Description of accessories

## Profile ▶



Track


Length	Code No.
1000mm	T225
2000mm	T226
3000mm	T227

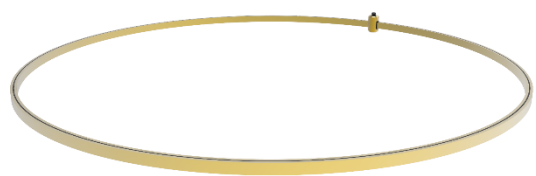

Track

Diameter	Code No.
1200mm	T136
1500mm	T137
1800mm	T138


## Installation Accessories ▶




T139




T140




T141 (With Electricity)




T142



T220 / T221



T222 / T223




T224




**Code: T146**

<b>Input Voltage</b>	DC42 150MA
<b>Power(Watts)</b>	6W
<b>Lumen</b>	427.9lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux C6
<b>Beam Angle</b>	35°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

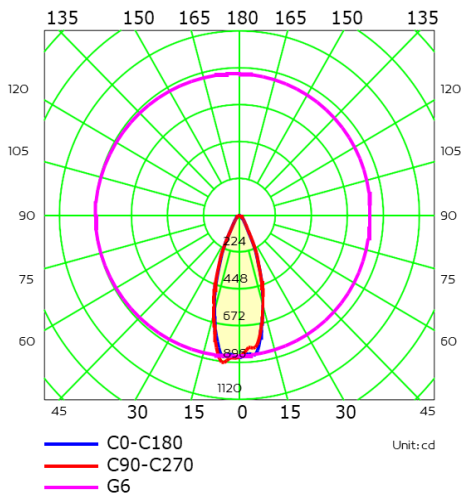


### AAI Figure

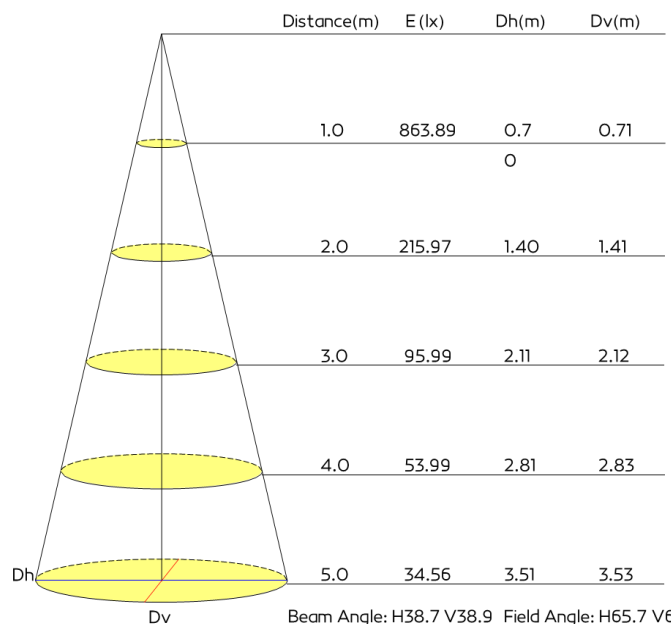




**Code: T147**

<b>Input Voltage</b>	DC42 100MA
<b>Power(Watts)</b>	4W
<b>Lumen</b>	306.8lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux V4 HD
<b>Beam Angle</b>	24°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

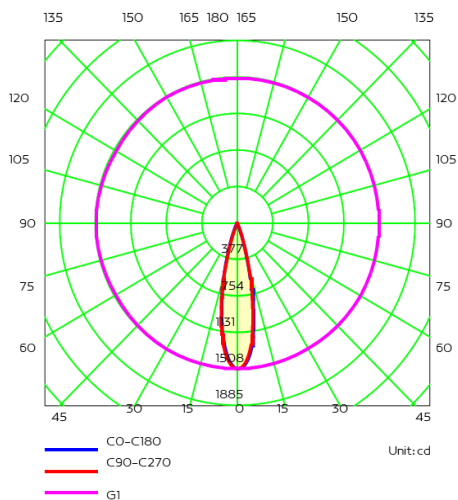

### AAI Figure

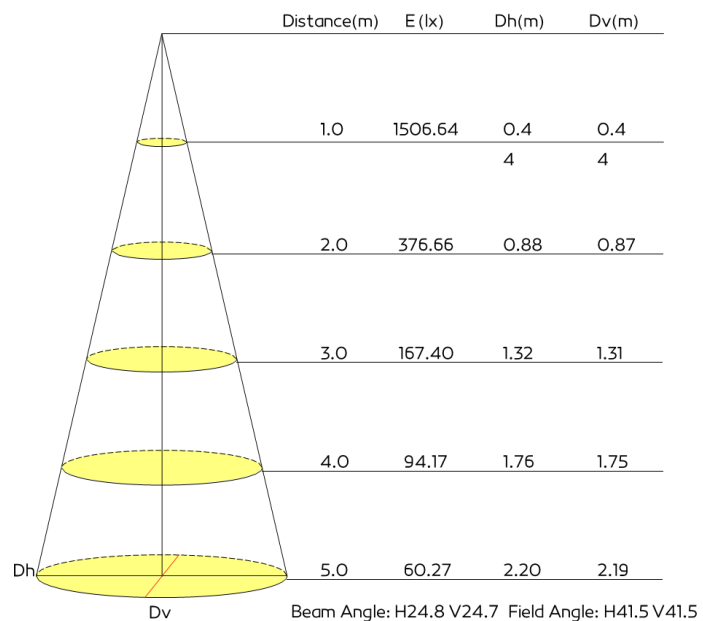







**Code: T148**

<b>Input Voltage</b>	DC42 215MA
<b>Power(Watts)</b>	9W
<b>Lumen</b>	620.8lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux V6 HD
<b>Beam Angle</b>	30°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	□I □II ■III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

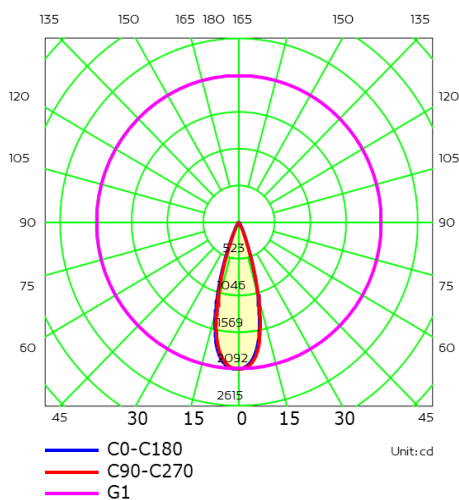


### AAI Figure

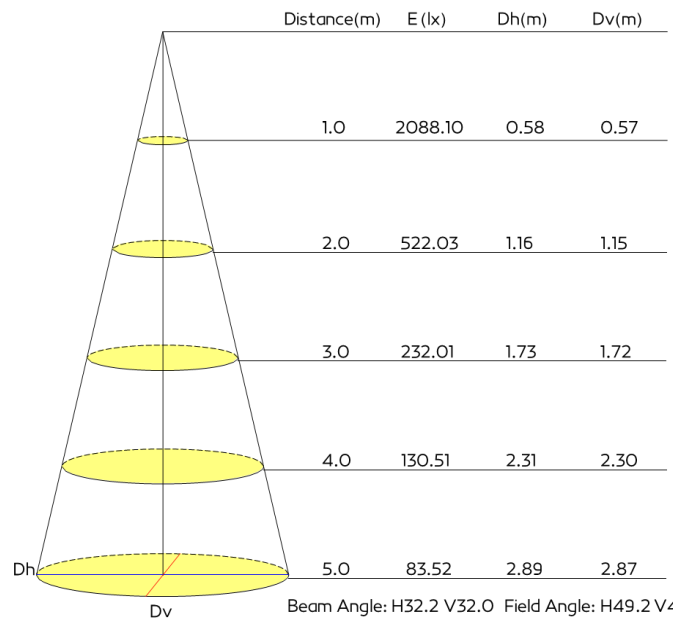




**Code: T269**

<b>Input Voltage</b>	DC42 96MA
<b>Power(Watts)</b>	3W
<b>Lumen</b>	90lm
<b>Lamp holder</b>	Aluminum PCB
<b>Light Source</b>	CREE 3030
<b>Beam Angle</b>	80°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	□I □II ■III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

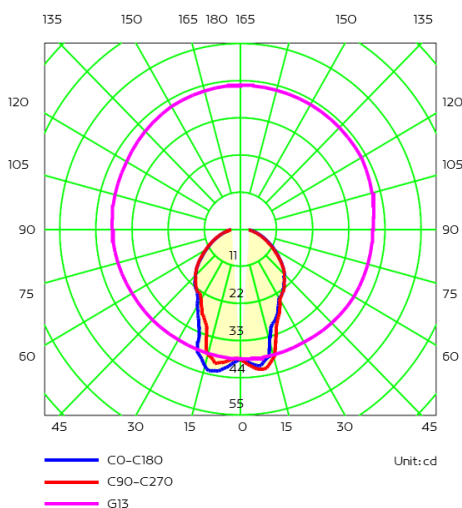


### AAI Figure

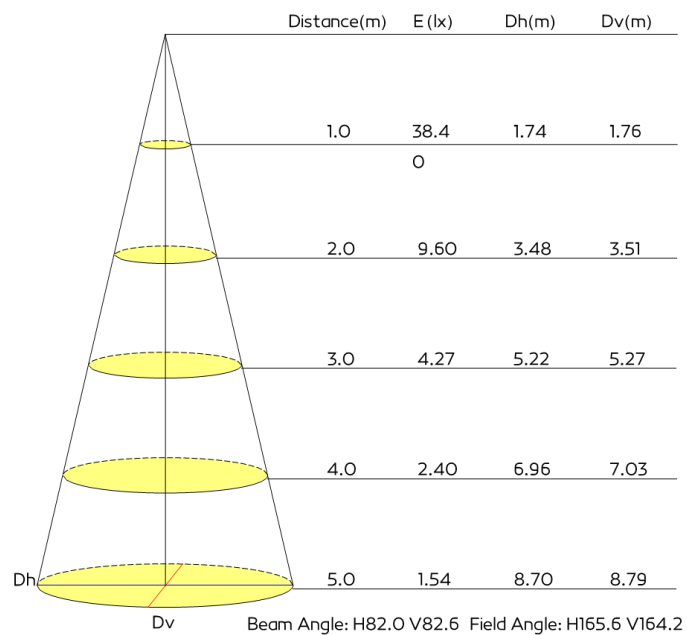




**Code: T149**

<b>Input Voltage</b>	DC42 96MA
<b>Power(Watts)</b>	3W
<b>Lumen</b>	86.7lm
<b>Lamp holder</b>	Aluminum PCB
<b>Light Source</b>	CREE 3030
<b>Beam Angle</b>	90°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	□I □II ■III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

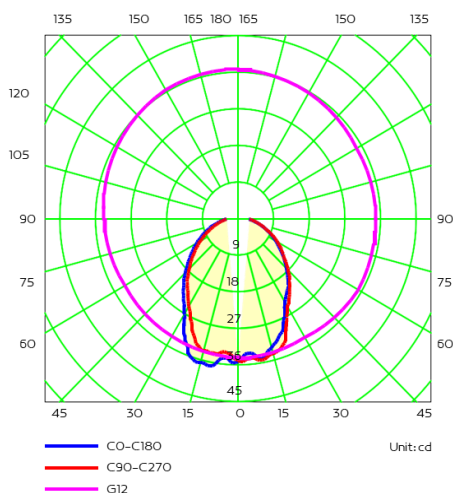


### AAI Figure

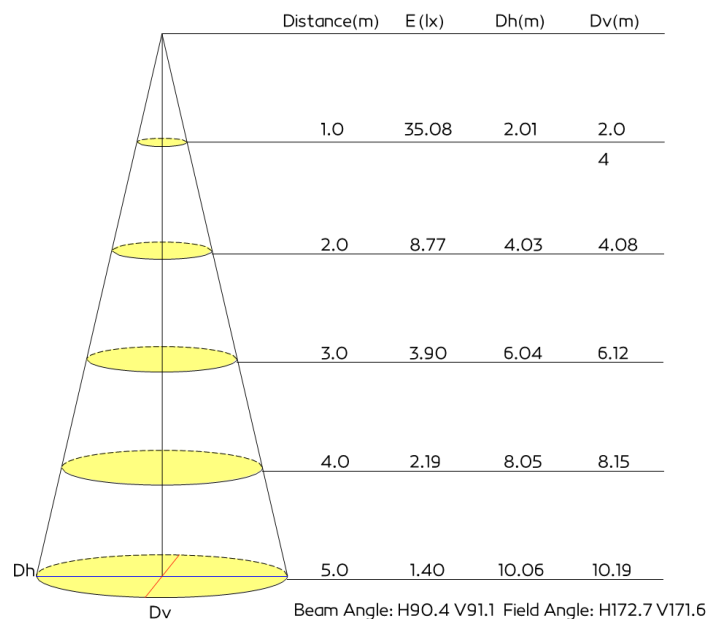




**Code: T150**

<b>Input Voltage</b>	DC42 110MA
<b>Power(Watts)</b>	4W
<b>Lumen</b>	251.8lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux 2835
<b>Beam Angle</b>	220°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	□I □II ■III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

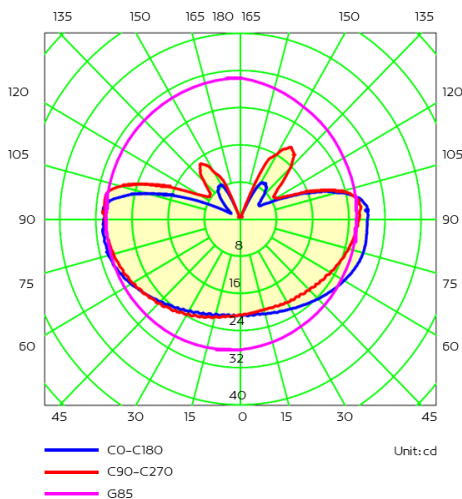


### AAI Figure

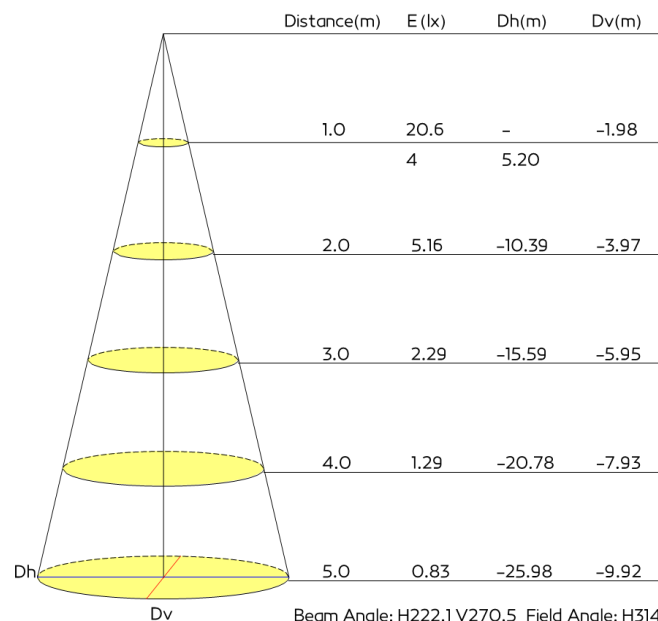




**Code: T272**

<b>Input Voltage</b>	DC42 96MA
<b>Power(Watts)</b>	2x4W (8W)
<b>Lumen</b>	488lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux C6
<b>Beam Angle</b>	350°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

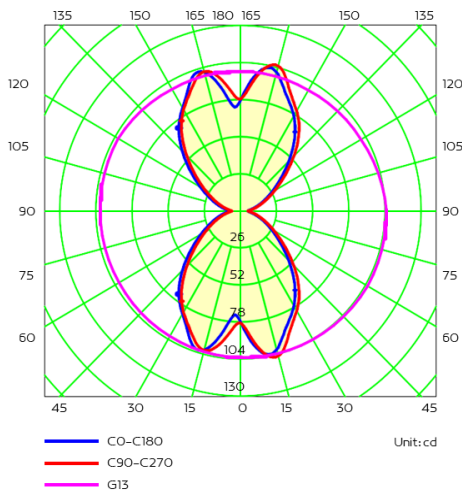


### AAI Figure

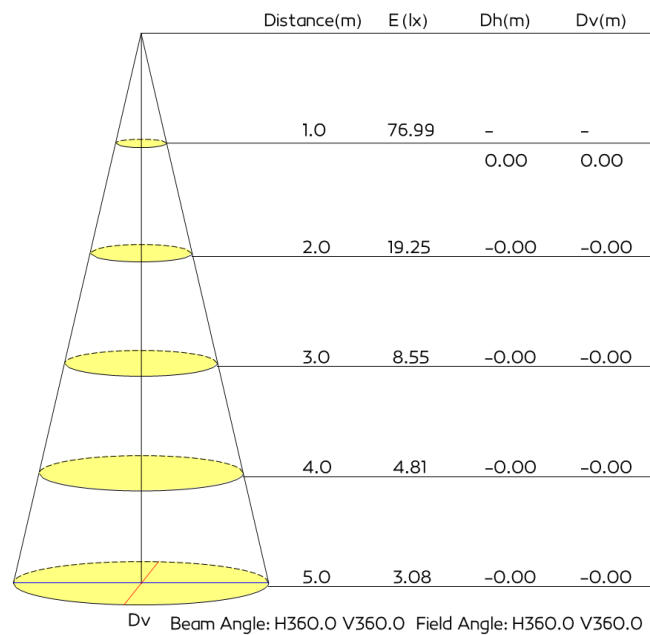




**Code: T271**

<b>Input Voltage</b>	DC42 96MA
<b>Power(Watts)</b>	4W
<b>Lumen</b>	244lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux C6
<b>Beam Angle</b>	90°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

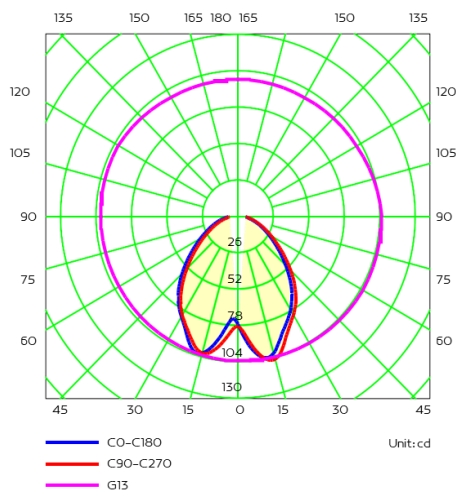


### AAI Figure

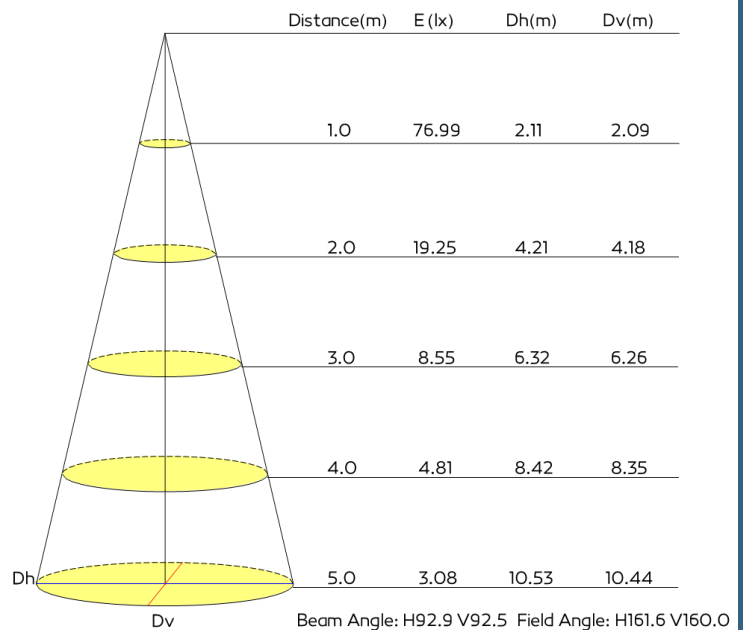




**Code: T151**

<b>Input Voltage</b>	DC42 96MA
<b>Power(Watts)</b>	4W
<b>Lumen</b>	232.9lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux C6
<b>Beam Angle</b>	20°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

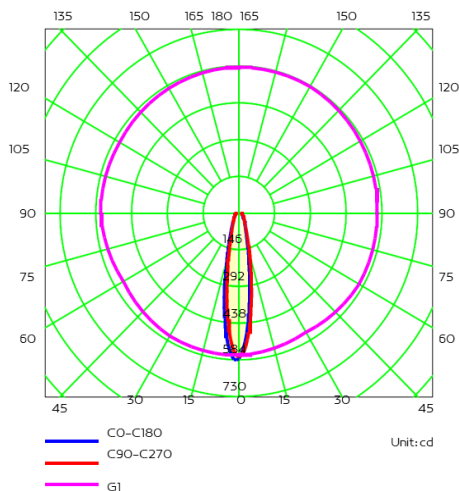


### AAI Figure

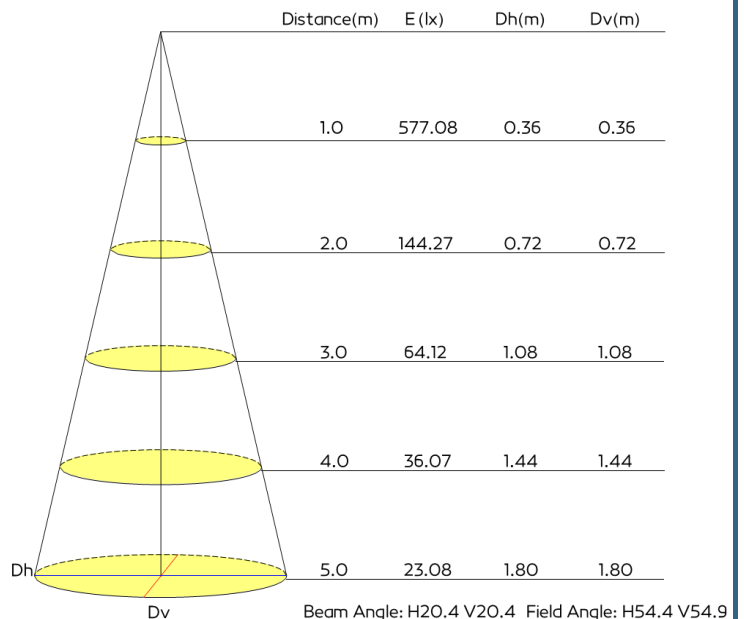




**Code: T152**

<b>Input Voltage</b>	DC42 100MA
<b>Power(Watts)</b>	4W
<b>Lumen</b>	297.8lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux V4 HD
<b>Beam Angle</b>	24°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	□I □II ■III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

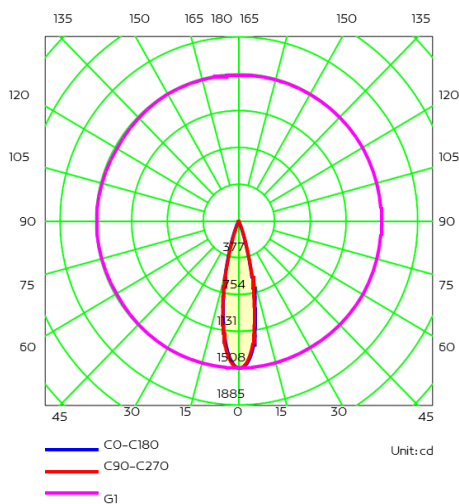

### AAI Figure

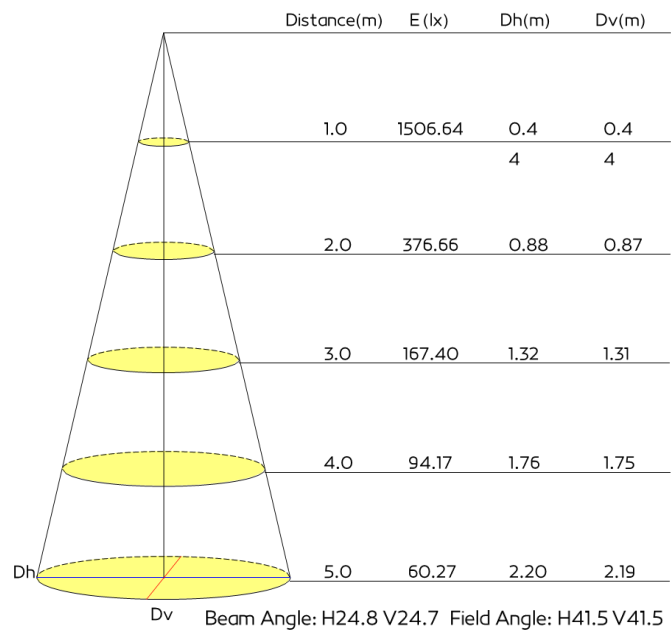







**Code: T153**

<b>Input Voltage</b>	DC42 215MA
<b>Power(Watts)</b>	9W
<b>Lumen</b>	620.8lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux V6 HD
<b>Beam Angle</b>	30°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	□I □II ■III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional

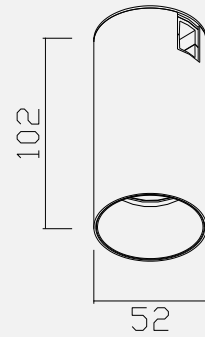


## Optic Data

### Luminous Intensity Distribution Curve

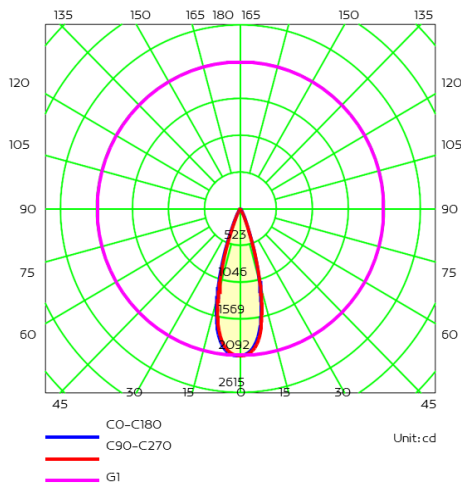

### AAI Figure

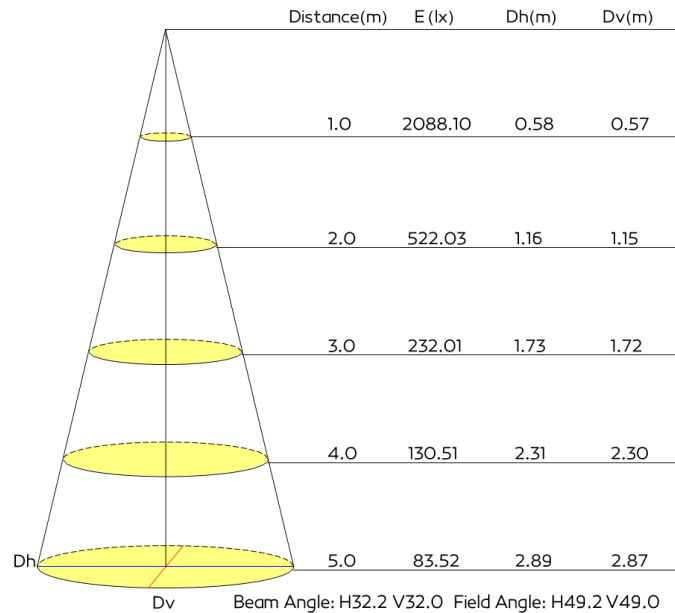




**Code: T270**

<b>Input Voltage</b>	DC42 100MA
<b>Power(Watts)</b>	4W
<b>Lumen</b>	211.7lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux V4 HD
<b>Beam Angle</b>	24°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

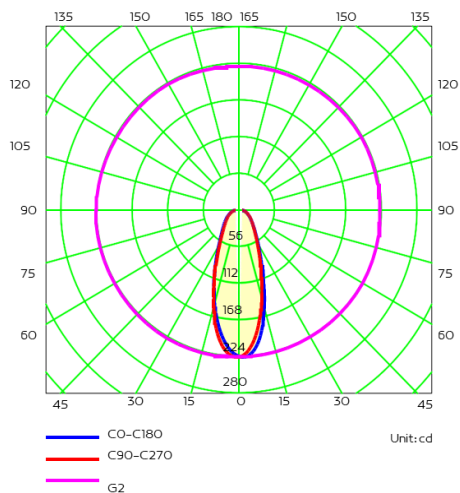


### AAI Figure

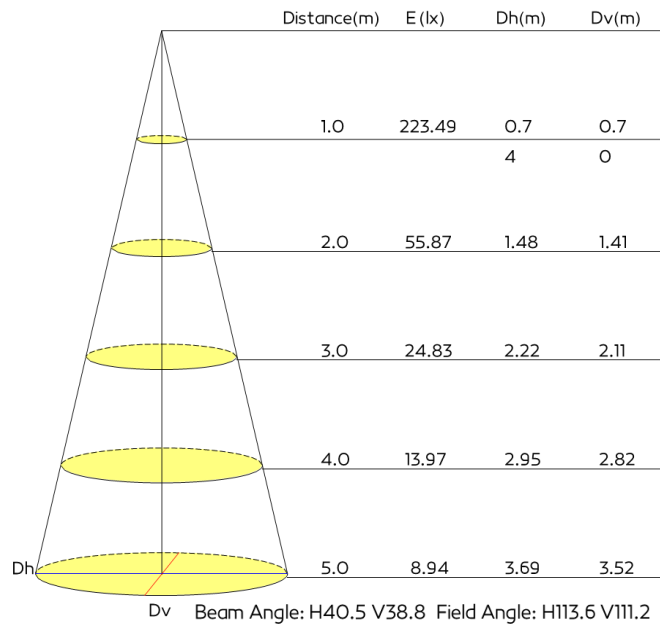




**Code: T154**

<b>Input Voltage</b>	DC42 215MA
<b>Power(Watts)</b>	9W
<b>Lumen</b>	452lm
<b>Lamp holder</b>	Ceramic PCB
<b>Light Source</b>	Bridgelux V6 HD
<b>Beam Angle</b>	30°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	□I □II ■III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional




## Optic Data

### Luminous Intensity Distribution Curve

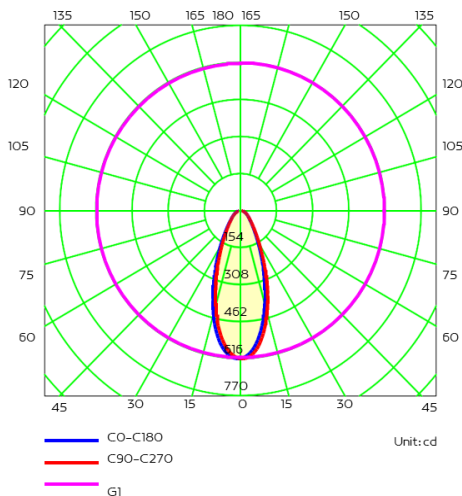



### AAI Figure

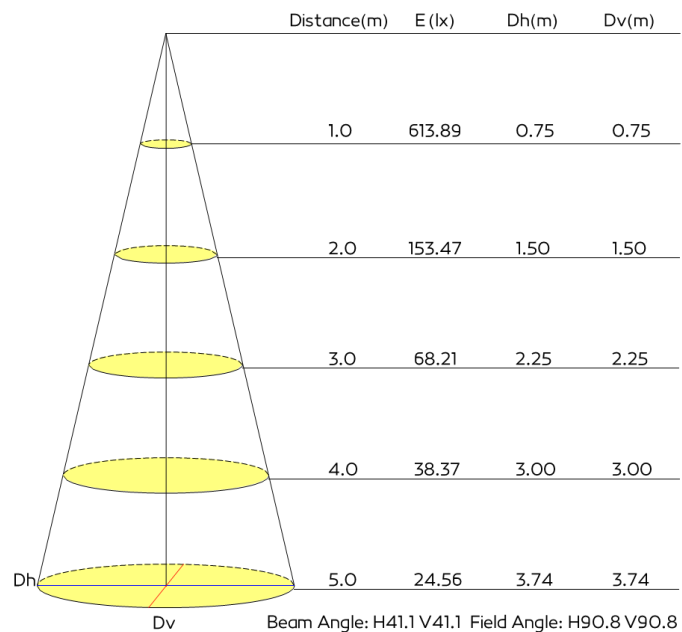




**Code: T155**

<b>Input Voltage</b>	DC42 120MA
<b>Power(Watts)</b>	5W
<b>Lumen</b>	259.7lm
<b>Lamp holder</b>	Aluminum PCB
<b>Light Source</b>	Bridgelux 2835
<b>Beam Angle</b>	110°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional

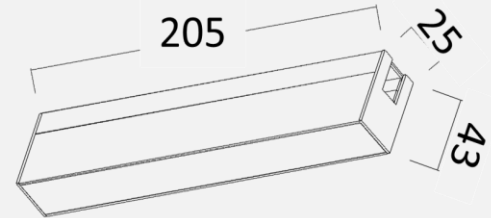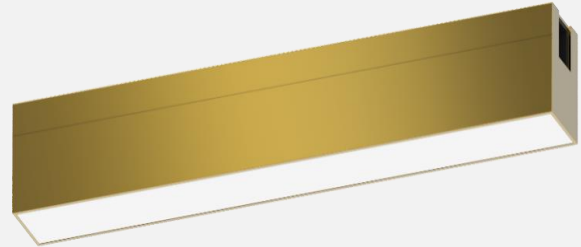


## Optic Data

### Luminous Intensity Distribution Curve

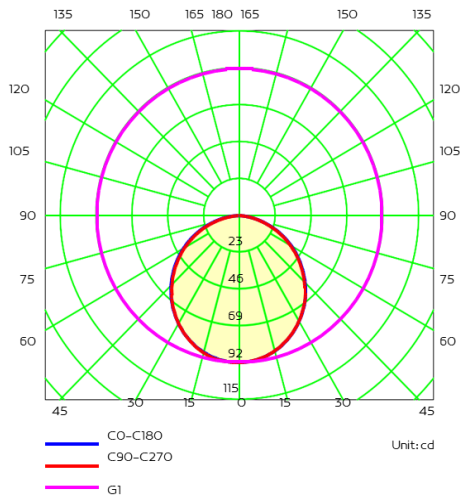



### AAI Figure

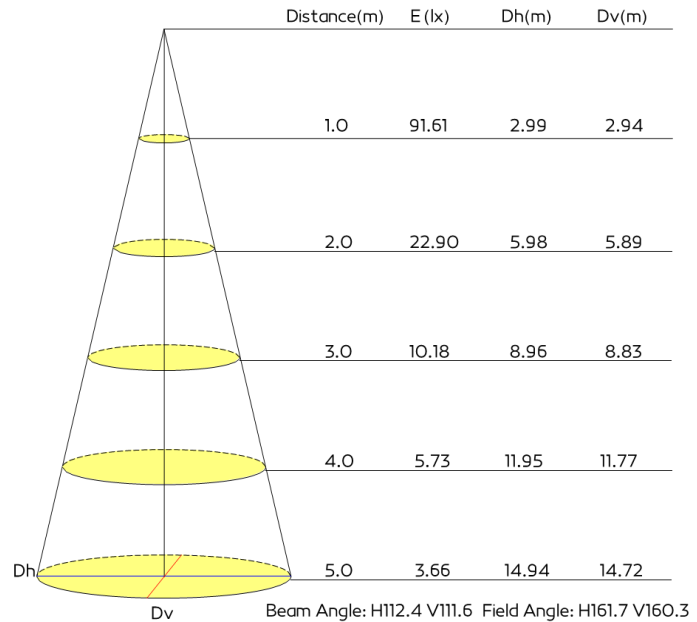




**Code: T156**

<b>Input Voltage</b>	DC42 230MA
<b>Power(Watts)</b>	9x1W (9W)
<b>Lumen</b>	562.2lm
<b>Lamp holder</b>	Aluminum PCB
<b>Light Source</b>	CREE XPE-2
<b>Beam Angle</b>	24°
<b>Color Temperature</b>	3000K
<b>CRI ≥</b>	80
<b>IP level</b>	IP20
<b>Main Material</b>	Brass
<b>Wire connection way</b>	Track Adaptor
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Guarantee</b>	3 years
<b>Warranty</b>	5 years
<b>Certificates</b>	CE . ROHS
<b>Dimmable</b>	Optional

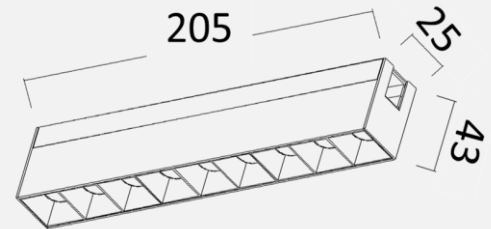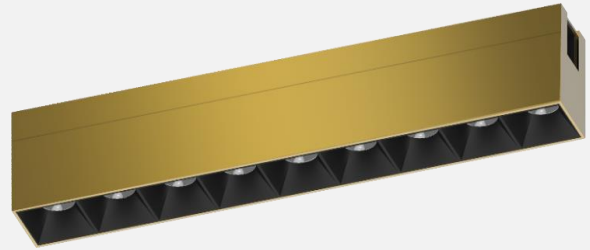


## Optic Data

### Luminous Intensity Distribution Curve

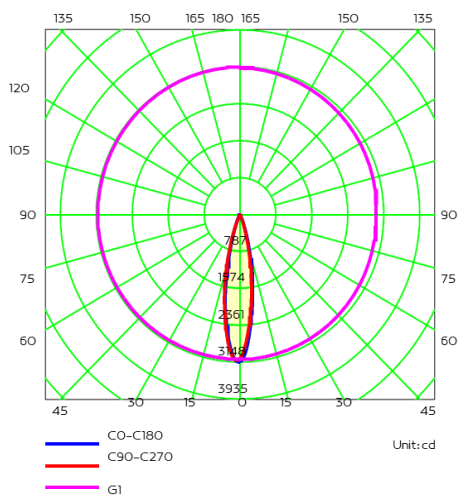


### AAI Figure

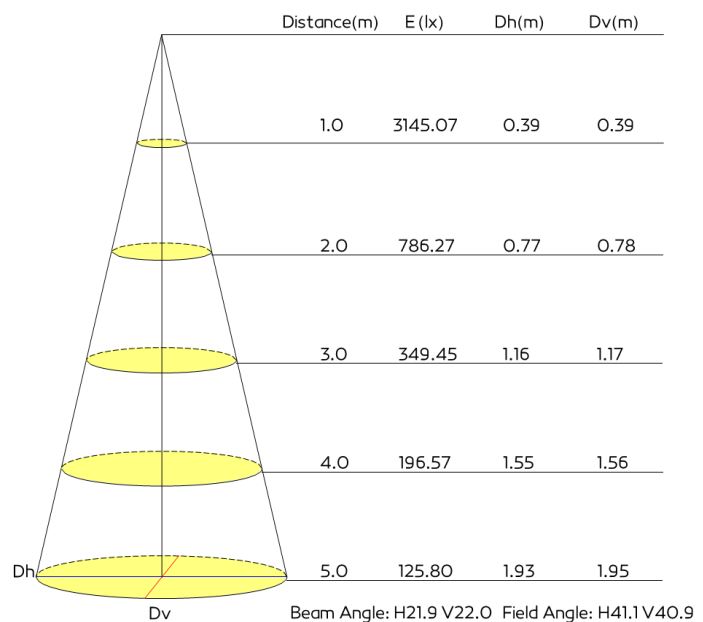



Installation exploded view

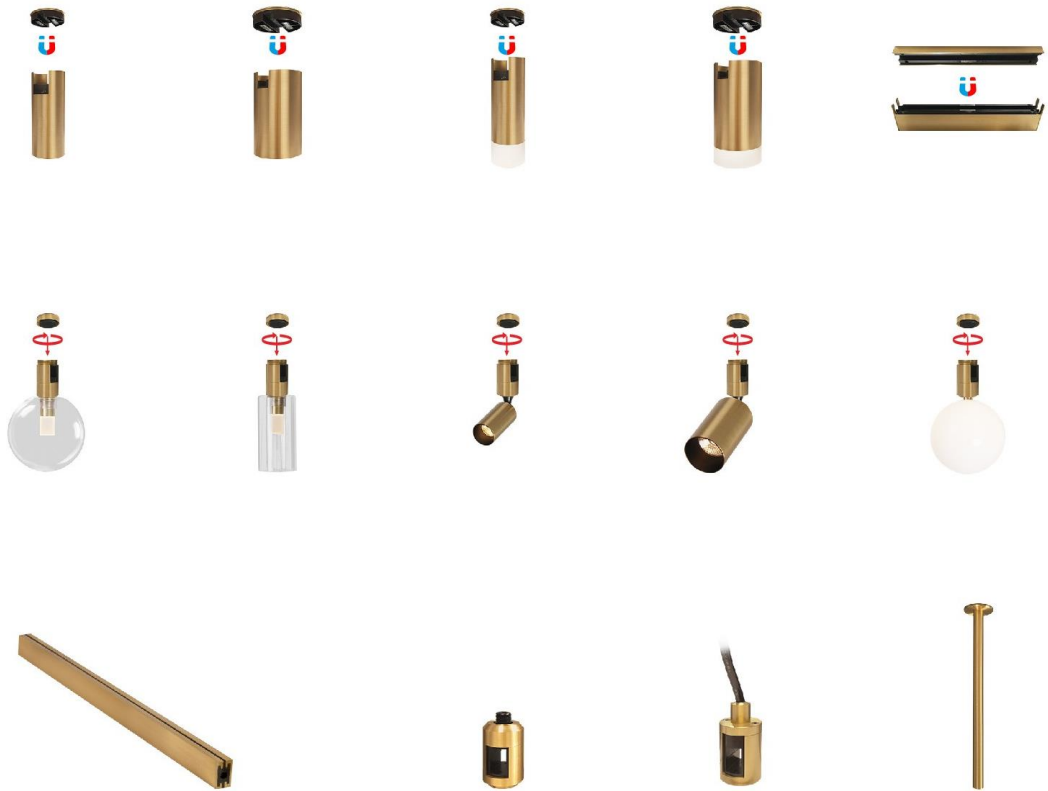



Installation exploded view





### Installation exploded view







Magnetic Brass Multi Track Light



Magnetic Brass Multi Track Light



Magnetic Brass Multi Track Light



نوران  
NOORAN