



نوران

NOORAN

Linear Light




Linear Light


Different Aluminum Profiles combined with wide range of LED sources to provide customized linear lighting solution








Profile : 1707



Profile : 1715



Profile : 1612H



Profile : 1712




Profile : 1602



Profile : 2623




Profile : 3030



Profile : 2114 TL



Profile : 7012TL



Profile : 4215



Profile : 9214 TL



Profile : 3535A



Profile : 3535M



Profile : 5532



Profile : 7635



Profile : 9035




Profile : 5575



Profile : 10235



Profile : 1807 - Curve



Profile : 3939H



Profile : 3939M



Profile : 5528B - Stairs



Profile : R60



Profile : R30



Profile : Cubic 1919



Profile : Redirect 091



Profile : Burried 632

Products Code : Line Light 1707 / 1715




Line Light : Code 1707



Line Light : Code 1715

Light Sources	Power		Luminous		CCT		CRI Color Rendering Index
	Per Meter		Per Meter		Color Temperature		
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	
High-Power	24	Watt	2500	Lumen	4000	Kalvin	> 80
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / ENEC / AGS / UL

Powered By: 

Accessories	Fixtures	End Cap
Line Light 1707		
Line Light 1715		

Profile Dimensions	Width	Height	Length
Line Light 1707	17 mm	7 mm	Per Order
Line Light 1715	17 mm	15 mm	


Material / Profile: Anodized Aluminum / Diffuser: PMMA




Product Code : Line Light 1612H / 1712



Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	11	Watt	1200	Lumen	3000	Kalvin	
High-Power	23	Watt	2500	Lumen	4000	Kalvin	> 80
High-Efficiency	23.4	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / GS / UL

Powered By: 

Accessories	Fixtures	End Cap
Line Light 1612H		
Line Light 1712		

Profile Dimensions	Width	Height	Length
Line Light 1612H	16 mm	12 mm	Per Order
Line Light 1712	17 mm	12 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA



Products Code : Line Light 1602 / 2623




Line Light : Code 1602



Line Light : Code 2623

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature	Color Rendering Index	
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	
High-Power	24	Watt	2500	Lumen	4000	Kalvin	> 80
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / AGLS / UL

Powered By : 

Accessories

Fixtures

End Cap

Line Light 1602



Line Light 2623



Profile Dimensions

	Width	Height	Length
Line Light 1602	20 mm	20 mm	Per Order
Line Light 2623	26 mm	23 mm	

Material / Profile: Anodized Aluminum / Diffuser : PMMA

Product Code : Line Light 3030



Line Light : Code 3030

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature	Color Rendering Index	
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	> 80
	24	Watt	2400	Lumen			
High-Power	24	Watt	2500	Lumen	4000	Kalvin	
	48	Watt	5000	Lumen			
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / REACH / UL

Powered By : MEAN WELL

Accessories	Fixtures	End Cap
Line Light 3030		

Profile Dimensions	Width	Height	Length
Line Light 3030	30 mm	30 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA

Product Code : Line Light 2114TL / 7012TL




Line Light : Code 2114TL



Line Light : Code 7012TL

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	
High-Power	24	Watt	2500	Lumen	4000	Kalvin	> 80
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / A++ / UL

Powered By : 

Accessories	Fixtures	End Cap
Line Light 2114TL		
Line Light 7012 TL		

Profile Dimensions	Width	Height	Length
Line Light 2114TL	21 mm	14 mm	Per Order
Line Light 7012TL	70mm	12 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA



Product Code : Line Light 4215 / 9214TL



Line Light : Code 4215



Line Light : Code 9214

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	
High-Power	24	Watt	2500	Lumen	4000	Kalvin	> 80
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / A / UL

Powered By :

Accessories	Fixtures	End Cap
Line Light 4215		
Line Light 9214		

Profile Dimensions	Width	Height	Length
Line Light 4215	15 mm	42 mm	Per Order
Line Light 9214	92 mm	14 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA

Products Code : Line Light 3535A / 3535M



Line Light : Code 3535A



Line Light : Code 3535M

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	> 80
	24	Watt	2400	Lumen			
High-Power	24	Watt	2500	Lumen	4000	Kalvin	
	48	Watt	5000	Lumen	6000	Kalvin	
High-Efficiency	24	Watt	3500	Lumen			

Standards / CE / RoHS / GS / UL

Powered By:

Accessories	Fixtures	End Cap
Line Light 3535A		
Line Light 3535M		

Profile Dimensions	Width	Height	Length
Line Light 3535A	35 mm	35 mm	Per Order
Line Light 3535M	35 mm	35 mm	


Material / Profile: Anodized Aluminum / Diffuser : PMMA

Products Code : Line Light 5532 / 7635 / 9035



Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
	Mid-Power	12	Watt	1200	Lumen	3000	Kalvin
High-Power	24	Watt	2400	Lumen	4000	Kalvin	
	48	Watt	5000	Lumen	6000	Kalvin	
High-Efficiency	24	Watt	3500	Lumen			
	48	Watt	7000	Lumen			


Standards / CE / RoHS / AGLS / UL

Powered By: 

Accessories	Fixtures	End Cap
Line Light 5532 Line Light 7635 Line Light 9035		

Profile Dimensions	Width	Height	Length
Line Light 5532	55 mm	32 mm	Per Order
Line Light 7635	76 mm	35 mm	
Line Light 9035	90 mm	35 mm	

Material / Profile: Anodized Aluminum / Diffuser : PMMA

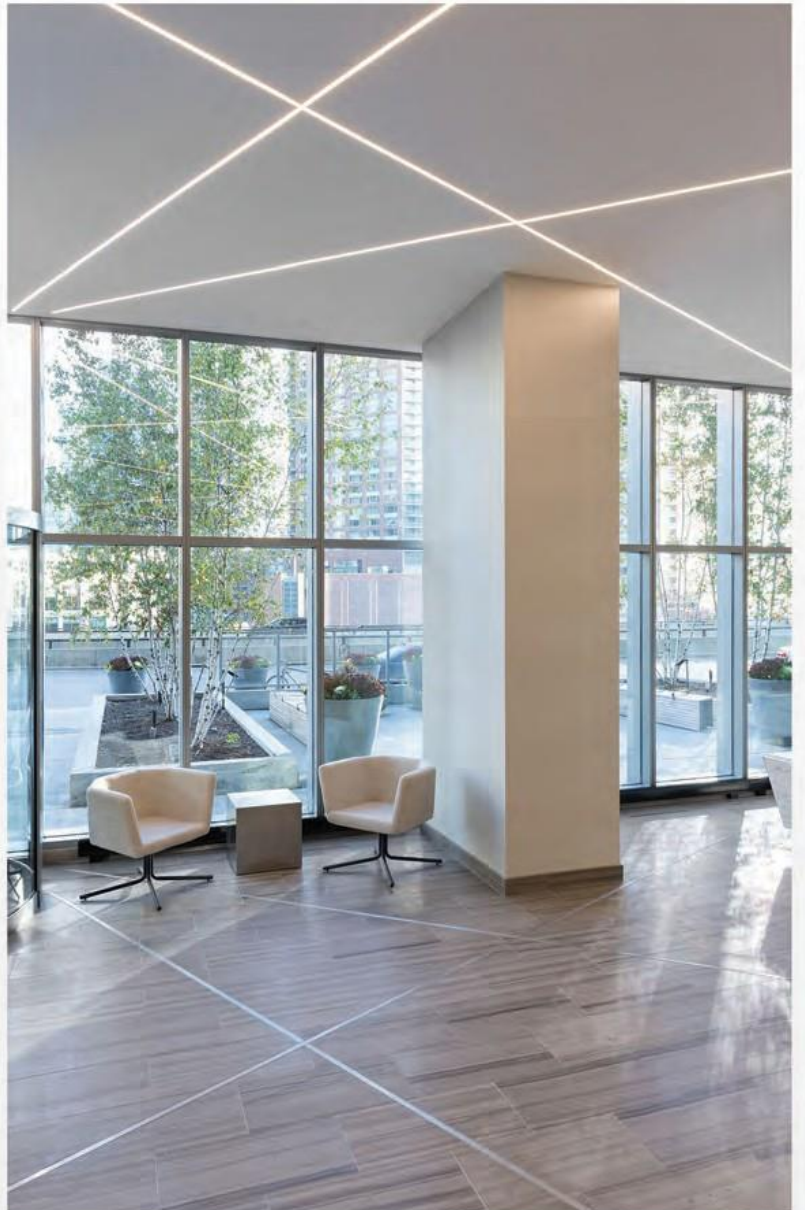

Products Code : Line Light 5575 / 10235



Line Light : Code 5575




Line Light : Code 10235

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	12	Watt	1200	Lumen			
	24	Watt	2400	Lumen			
	36	Watt	3600	Lumen			
High-Power	24	Watt	2500	Lumen	3000	Kalvin	
	48	Watt	5000	Lumen	4000	Kalvin	> 80
	72	Watt	7500	Lumen	6000	Kalvin	
High-Efficiency	24	Watt	3500	Lumen			
	48	Watt	7000	Lumen			
	72	Watt	10500	Lumen			

Accessories	Fixtures	End Cap
Line Light 5575		
Line Light 10235		

Profile Dimensions	Width	Height	Length
Line Light 5575	55 mm	75 mm	Per Order
Line Light 10235	102 mm	35 mm	

Material / Profile: Anodized Aluminum / Diffuser : PMMA

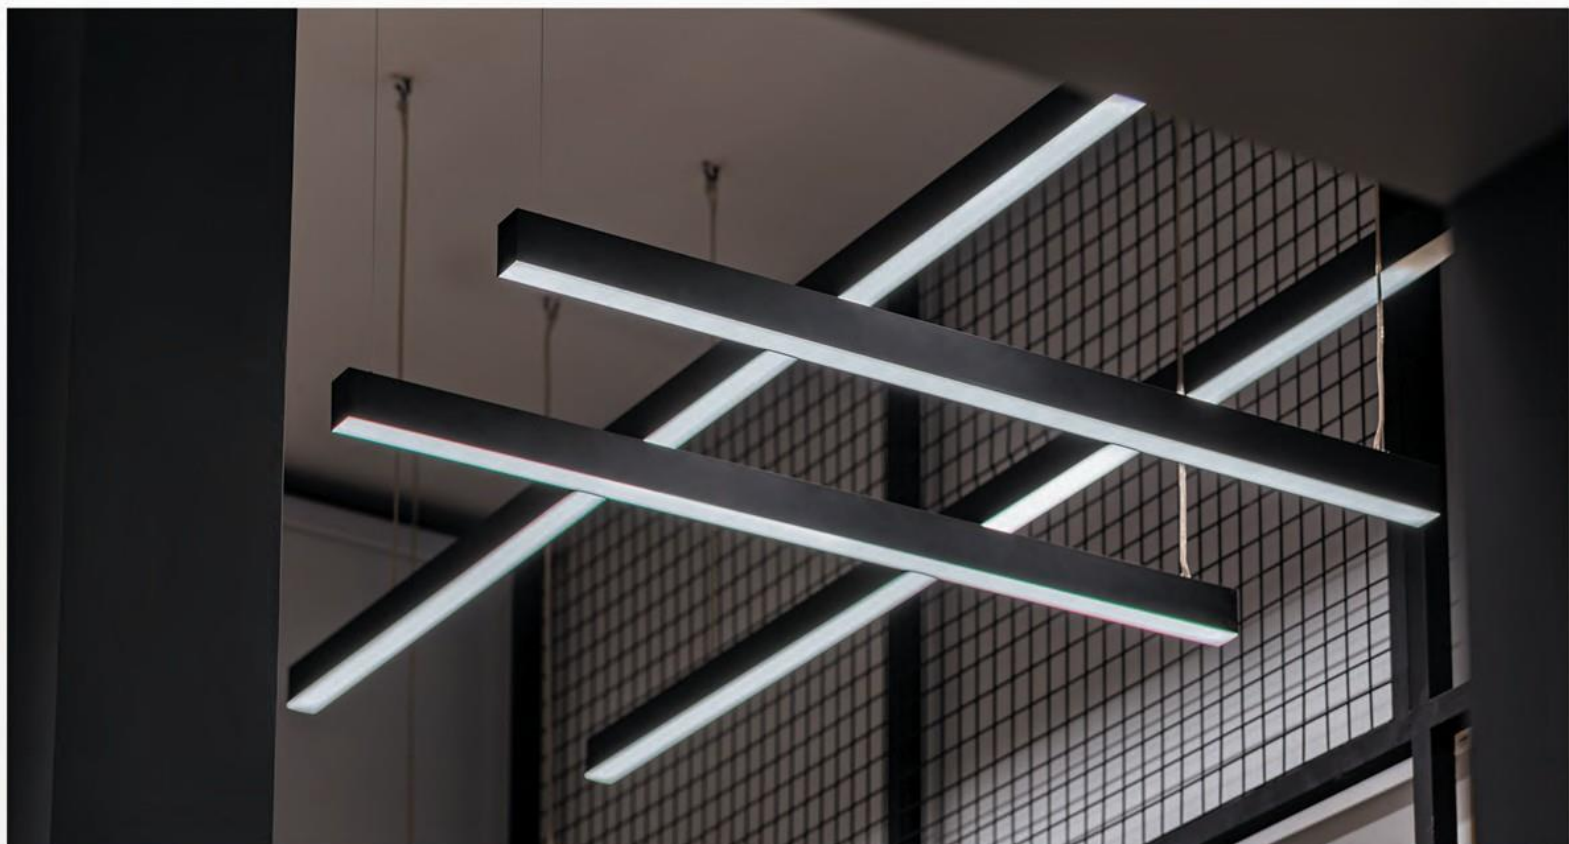


Product Code : Line Light Curve 1807



Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	11	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	23	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	23.4	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / REACH / UL

Powered By: 

Accessories

Fixtures

End Cap

Line Light Curve1807



Profile Dimensions

	Width	Height	Length
Line Light Curve1807	18 mm	7mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA




Product Code : Line Light 3939H / 3939M



Light Sources	Power		Luminous		CCT		CRI
	Per Meter	Watt	Per Meter	Lumen	Color Temperature	Kalvin	Color Rendering Index
Mid-Power	11	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	23	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	23.4	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / AGS / UL

Powered By: 

Accessories

End Cap

Line Light 3939



Profile Dimensions

Width

Height

Length

Line Light 3939

39 mm

39 mm

Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA




Product Code : Line Light Stairs 5528B



Line Light : Code 5528B

Light Sources	Power		Luminous		CCT		CRI
	Per Meter	Watt	Per Meter	Lumen	Color Temperature	Kalvin	Color Rendering Index
Mid-Power	11	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	23	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	23.4	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / A / UL

Powered By: 

Accessories

End Cap


Line Light Stairs 5528B



Profile Dimensions

	Width	Height	Length
Line Light Stairs 5528B	55 mm	28 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA

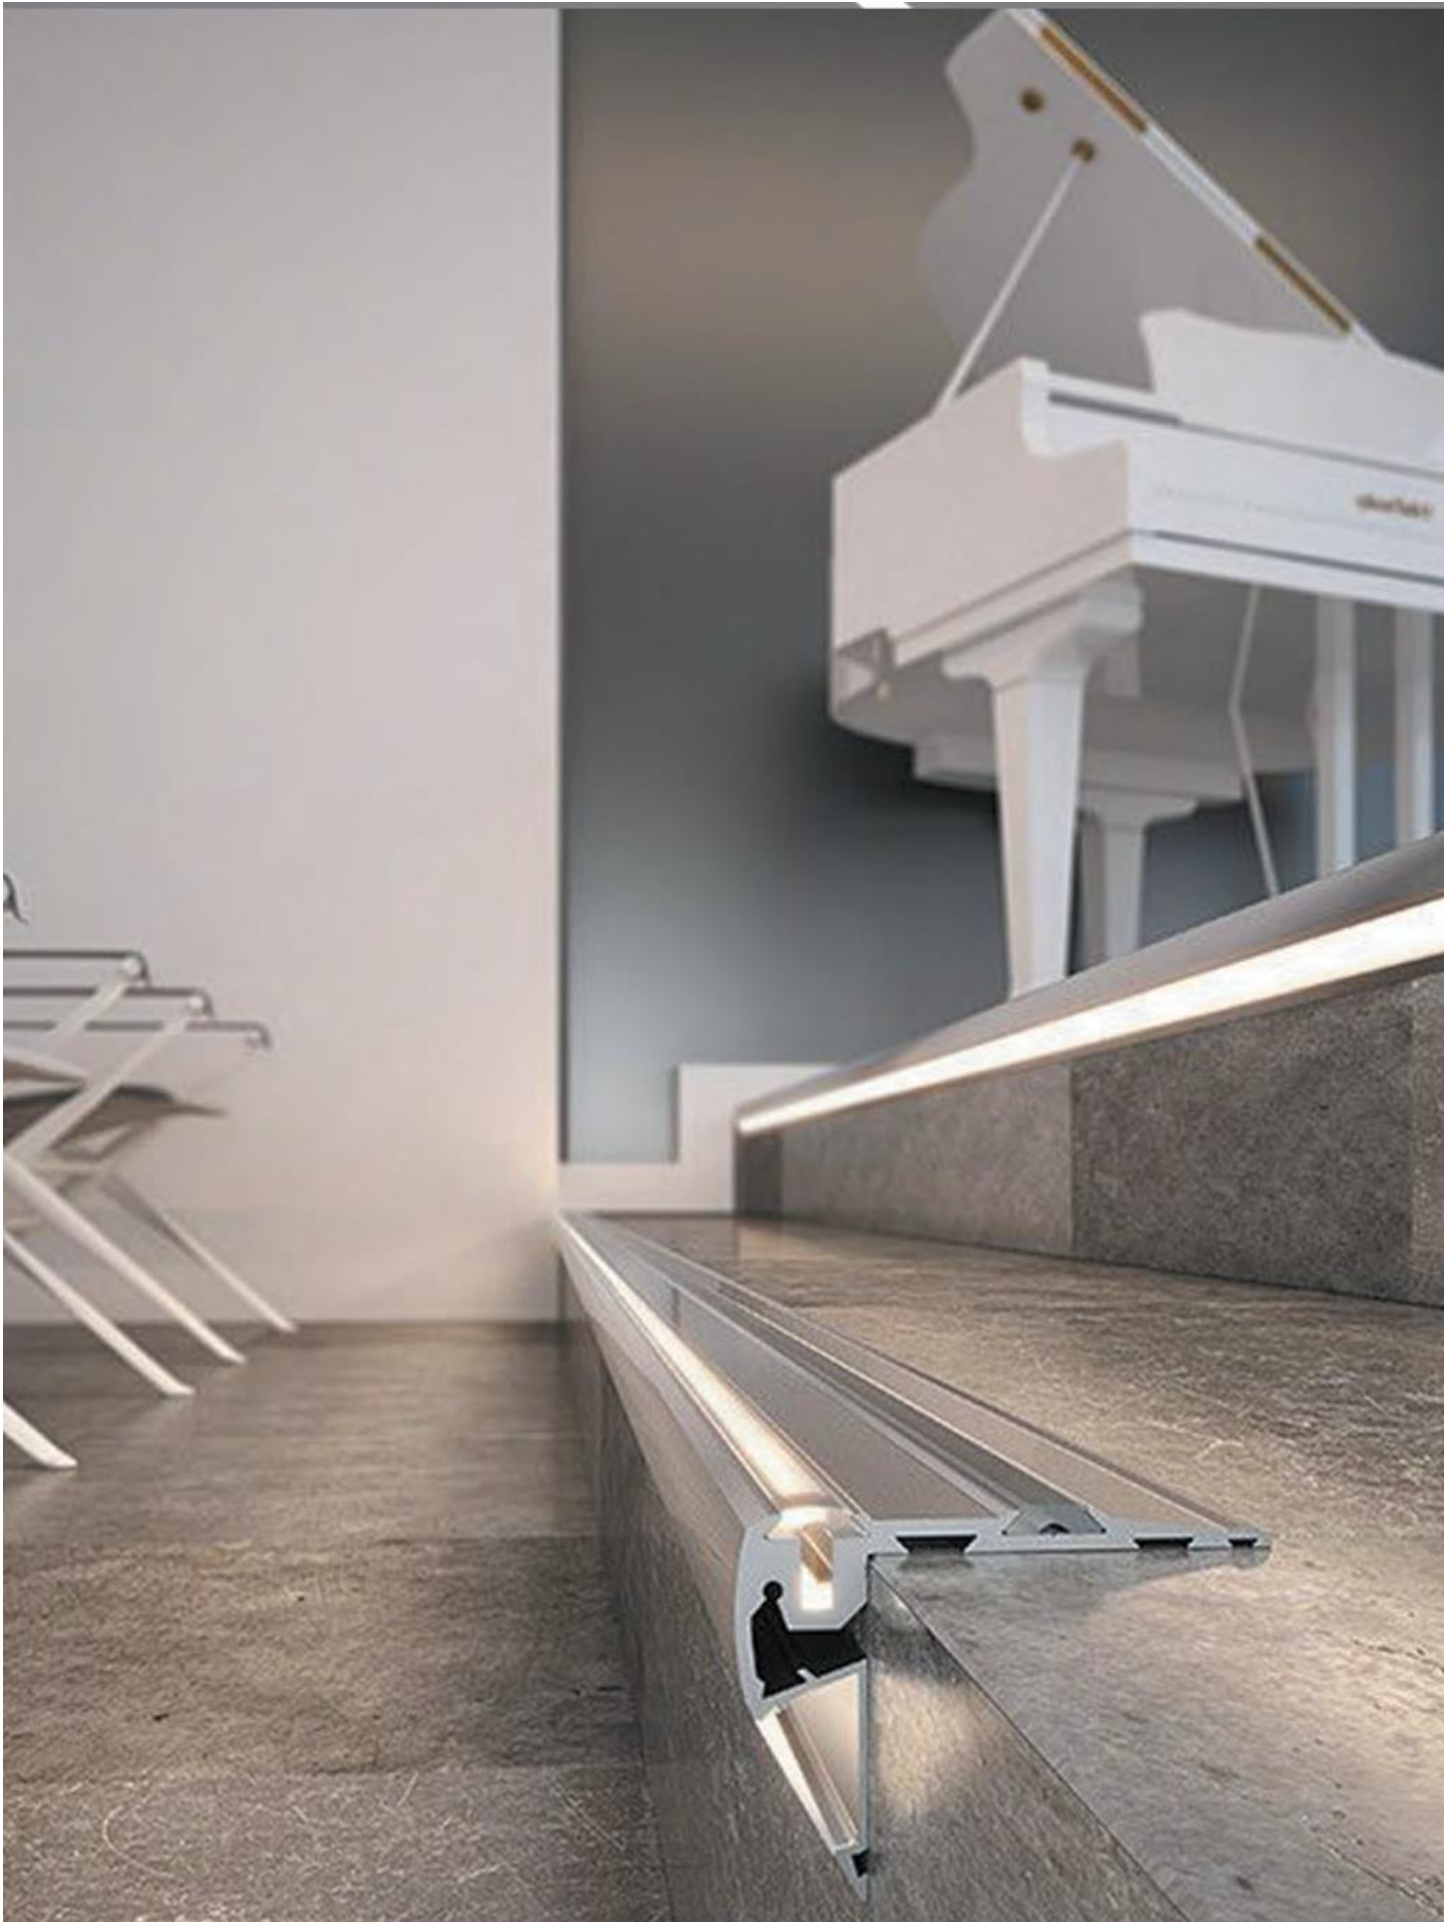

Products Code : Line Light R60 / R30




Line Light : Code R60



Line Light : Code R30

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	> 80
	24	Watt	2400	Lumen			
High-Power	24	Watt	2500	Lumen	4000	Kalvin	
	48	Watt	5000	Lumen			
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	
	48	Watt	7000	Lumen			


Standards / CE / RoHS / GS / UL

Powered By : 

Accessories	Fixtures	End Cap
Line Light R60		
Line Light R30		

Profile Dimensions	Width	Height	Length
Line Light R60	60 mm	60 mm	Per Order
Line Light R30	30 mm	30 mm	

Material / Profile: Anodized Aluminum / Diffuser: PMMA

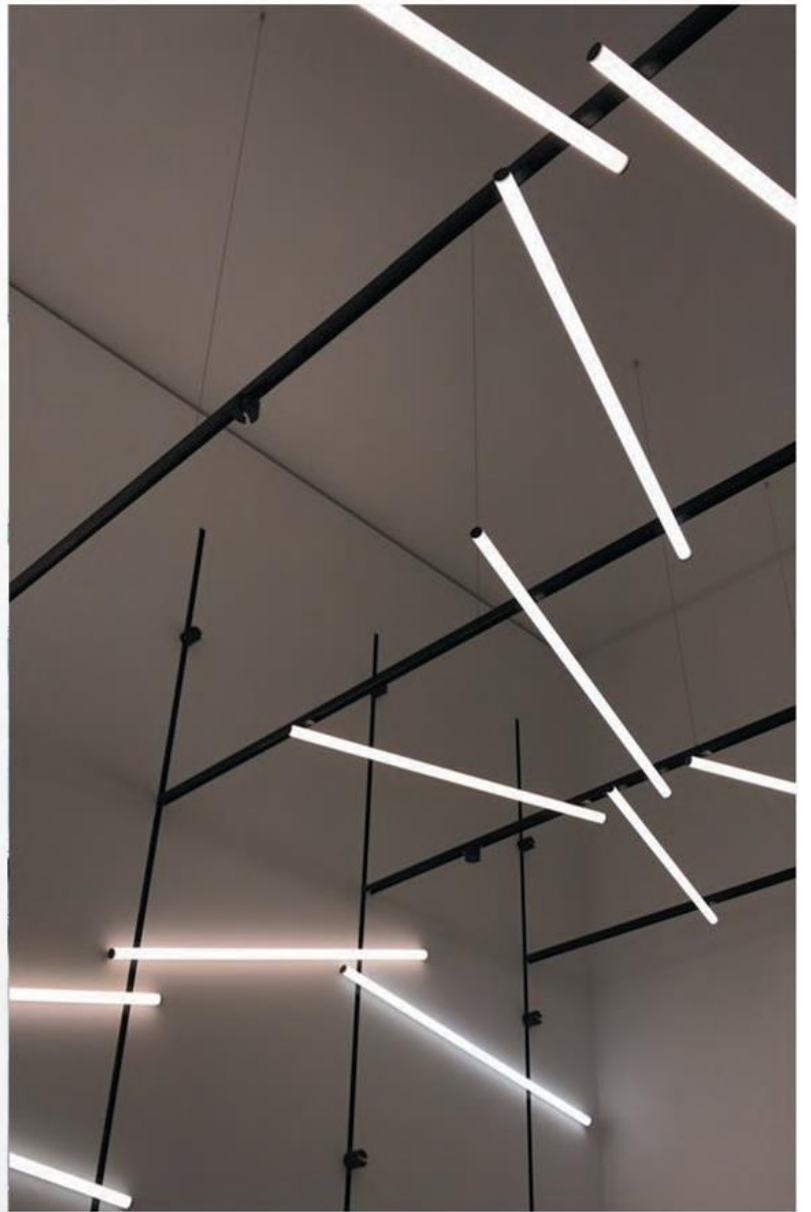


Product Code : Line Light Cubic1919



Line Light : Code 1919

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	11	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	23	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	23.4	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / RoHS / GS / UL

Powered By : 

Accessories

Fixtures

End Cap


Line Light Cubic1919



Profile Dimensions

	Width	Height	Length
Line Light Cubic1919	19 mm	19 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA

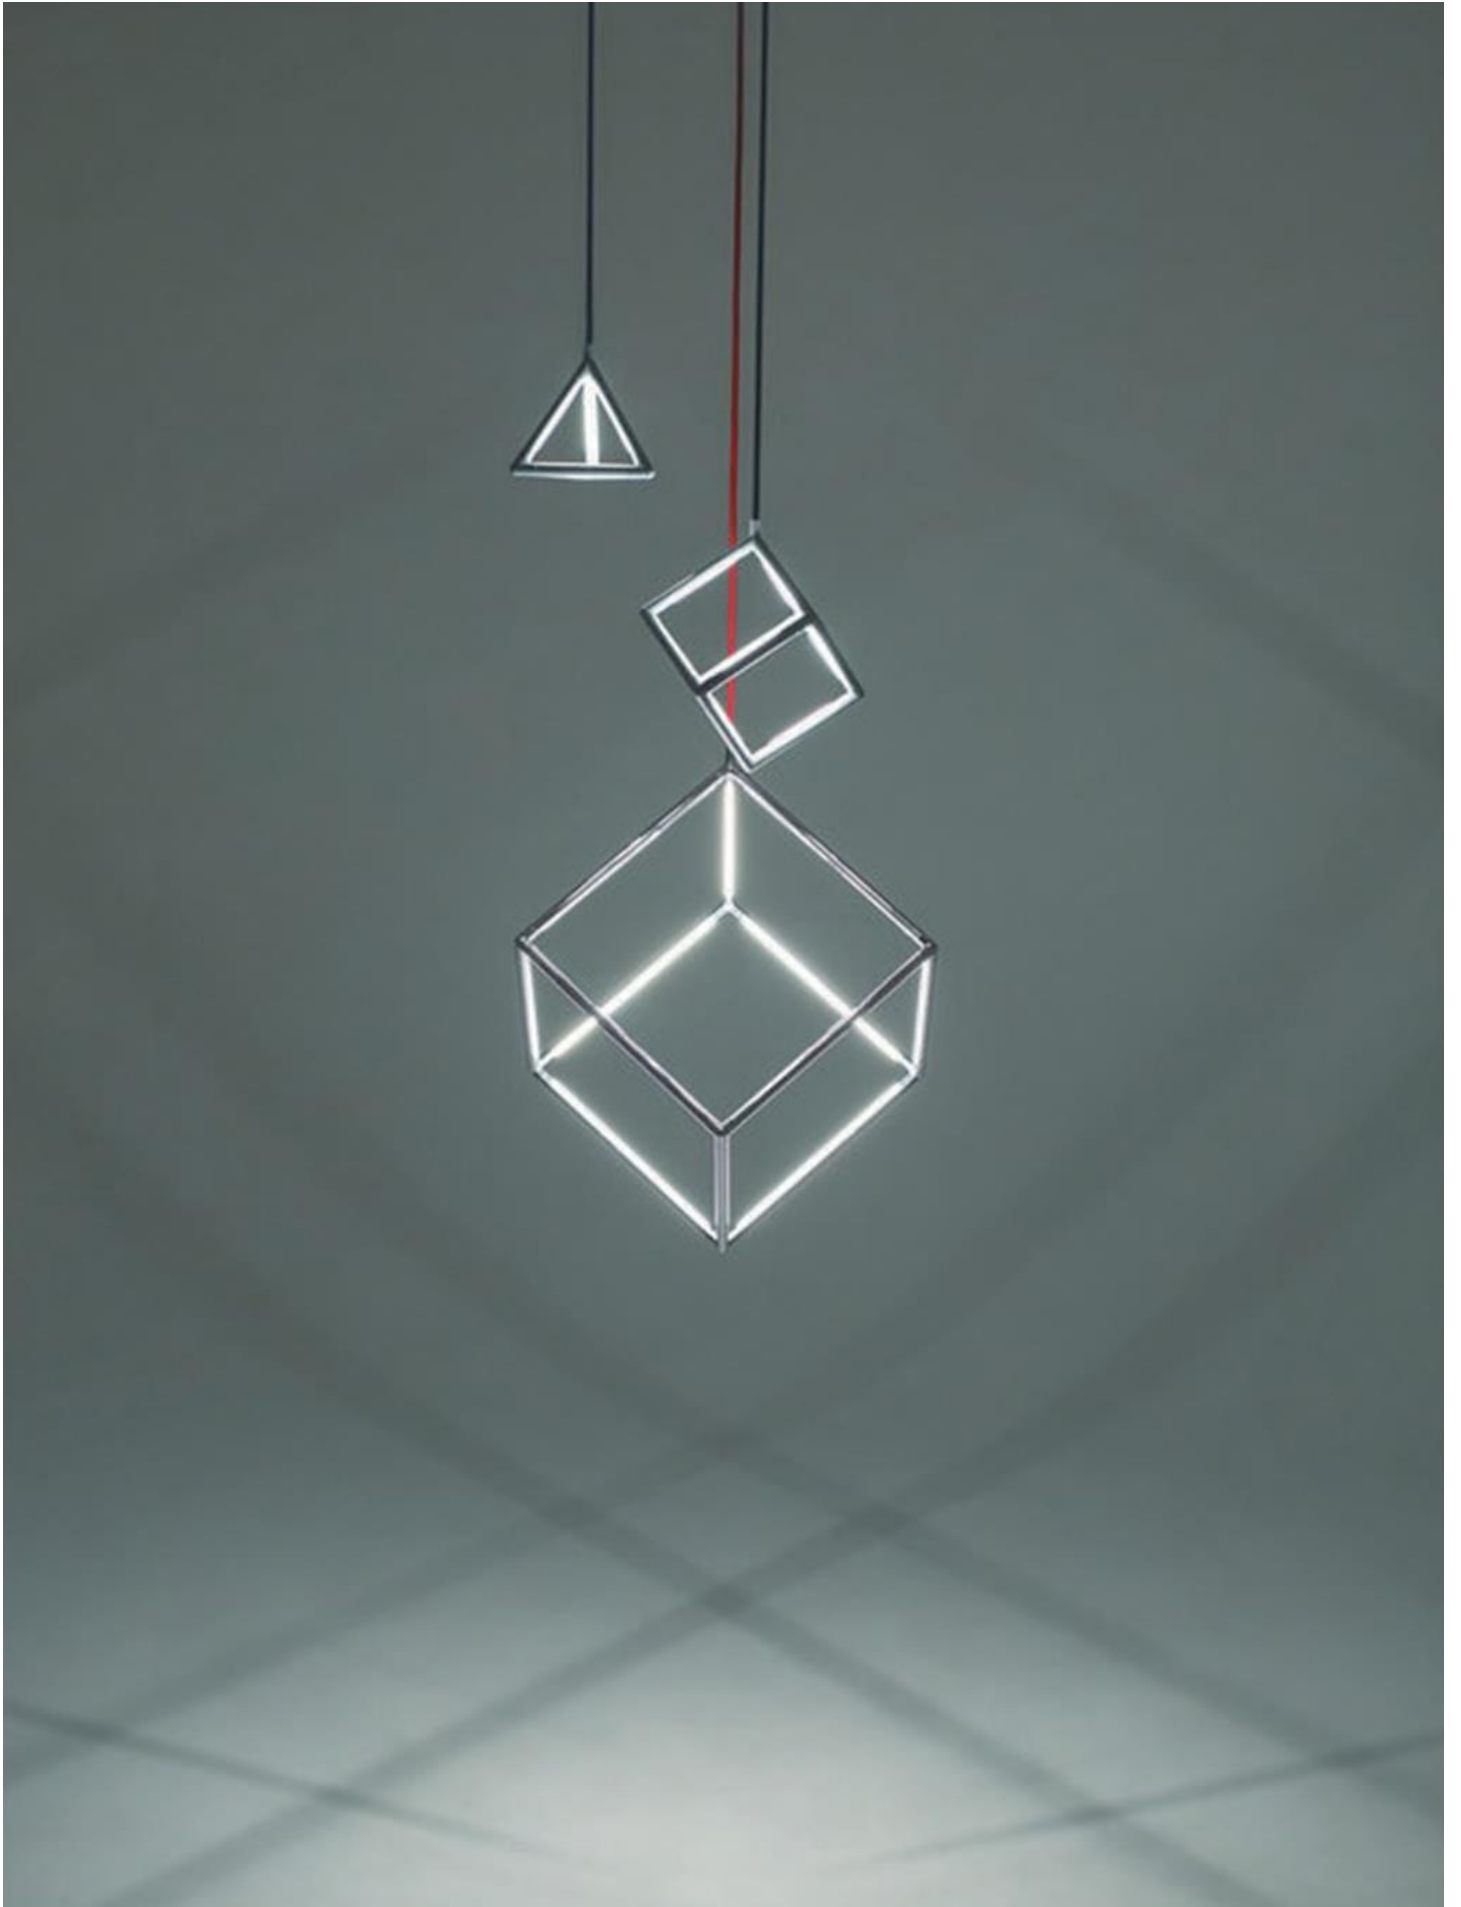


Product Code : Line Light Redirect SPL091



Line Light : Code SPL091

Light Sources	Power		Luminous		CCT		CRI
	Per Meter		Per Meter		Color Temperature		Color Rendering Index
Mid-Power	24	Watt	2400	Lumen	3000	Kalvin	> 80
High-Power	48	Watt	5000	Lumen	4000	Kalvin	
High-Efficiency	24	Watt	7000	Lumen	6000	Kalvin	

Standards / CE / RoHS / GS / UL

Powered By : 

Accessories

End Cap

Line Light SPL Redirect 091




Profile Dimensions

	Width	Height	Length
Line Light SPL Redirect 091	100 mm	50 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA




Product Code : Line Light Burried 632

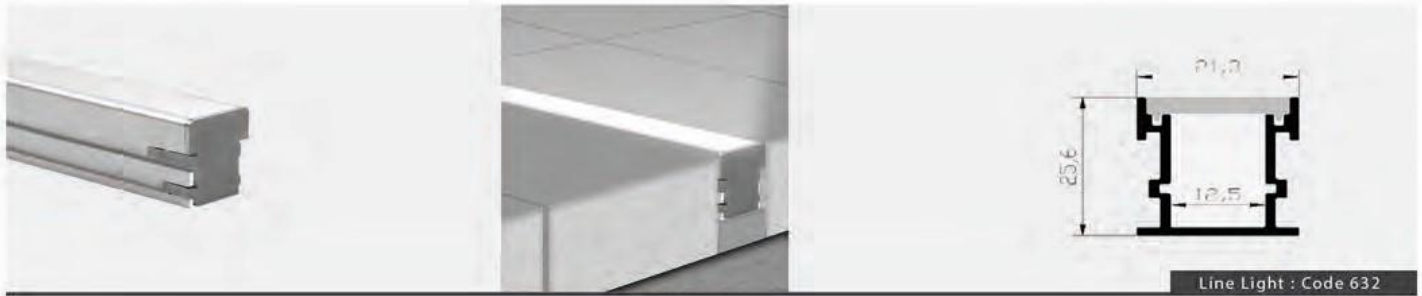


Line Light : Code 632

Light Sources	Power		Luminous		CCT		CRI	
	Per Meter	Watt	Per Meter	Lumen	Color Temperature	Kalvin	Color Rendering Index	
Mid-Power	12		1200		4000		> 80	IP68

Standards / CE / RoHS / UL

Powered By : 


Accessories	End Cap
Line Light Burried 632	

Profile Dimensions	Width	Height	Length
Line Light Burried 632	21 mm	26 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA



l i n e a r l i g h t s

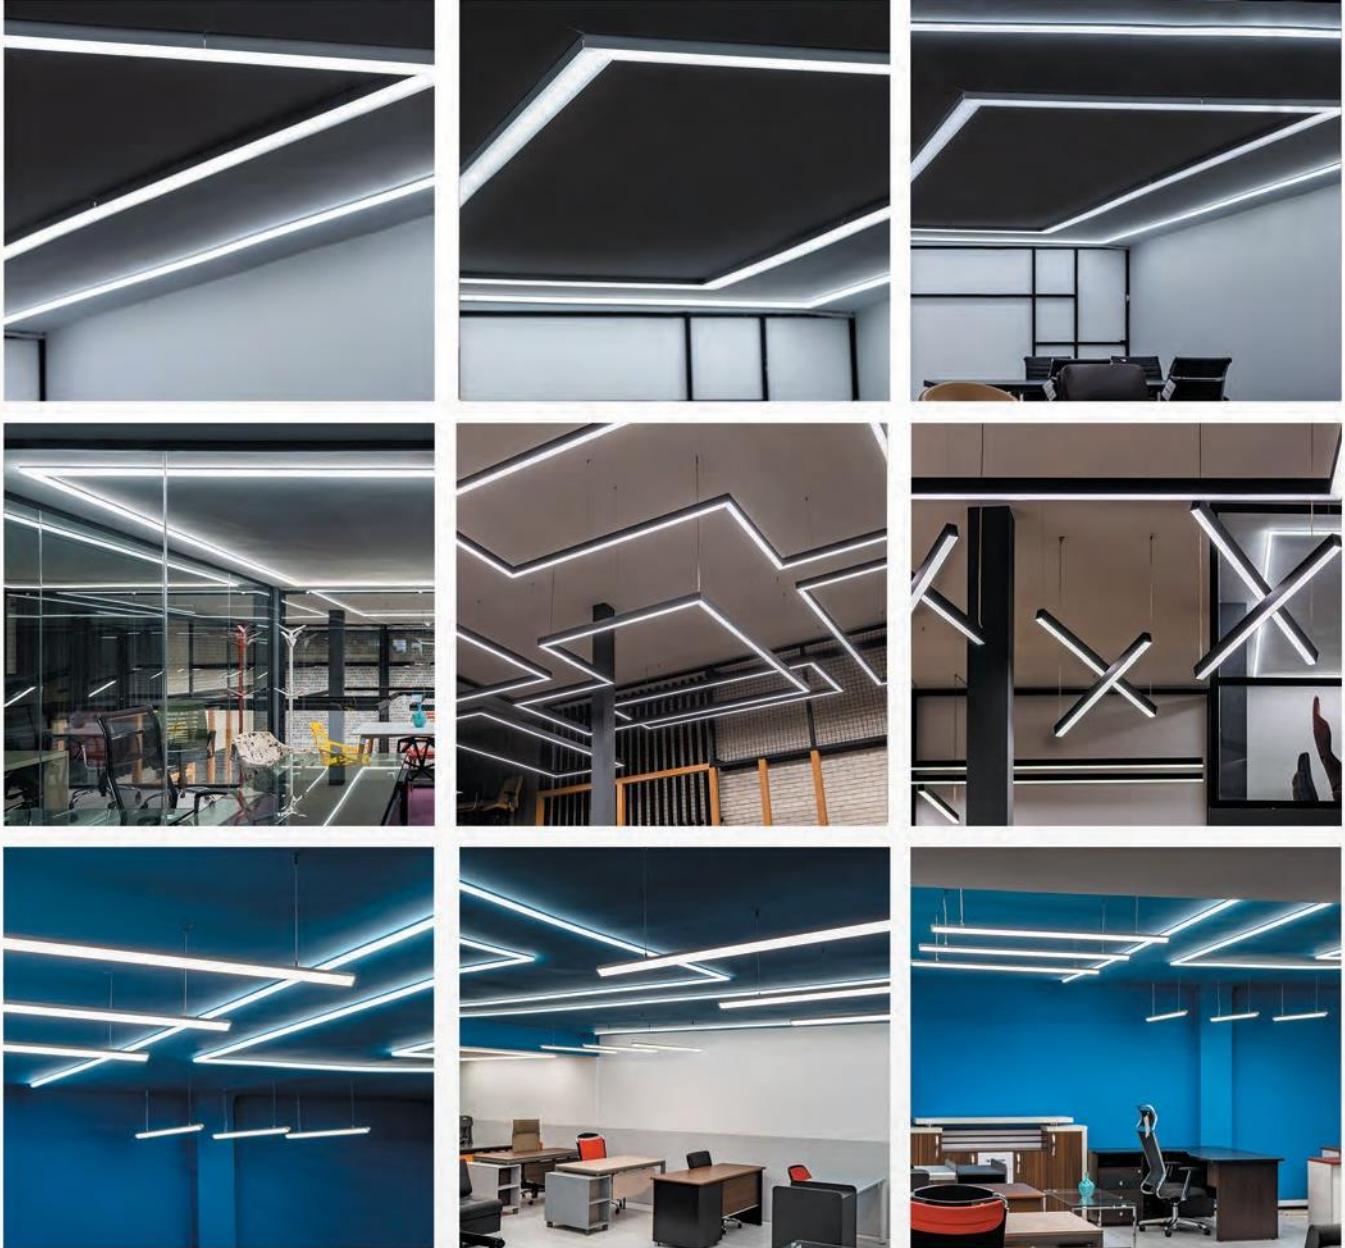



Code : C1-11052



Code : C1-11003



Code : C1-11009



Code : C1-11004



Code : C1-11027



Code : C1-11026-1



Code : C1-11026-2



Code : C1-11026-3



Code : C1-11030



Code : C1-11030-2



Code : C1-1037



Code : C1-3002



Code : C1-11011-R23



Code : C1-11011



Code : C1-12012



Code : W2-8063-2



Code : W2-8064-2




Code : C2-4016-5



Code : C2-4017-5



Code : W2-8086



Code : W2-12011



Code : W1-11024



Code : W1-11023



Code : W2-8060



Code : W2-12040



Code : C2-11015-R



Code : C2-11015-SQ



Code : W2-4030



Code : W2-4031



Code : W2-4032



Code : W1-12012



Code : W1-3004



Code : W1-11020

Product : SPL Flex Light



Code : SPL - TC



Code : SPL - TB




Code : SPL - Tube 360

Product : SPL - Point To Point Line Light





Code : Point To Point

Products Code : C1-11052 / C1-11003 / C1-11030 / C1-11004

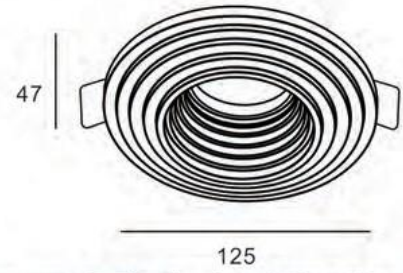


IP20 F CE ROHS

Product Code : C1-11052

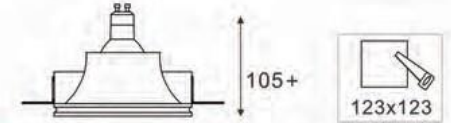



IP20 F CE ROHS

Product Code : C1-11003



IP20 F CE ROHS


Product Code : C1-11009

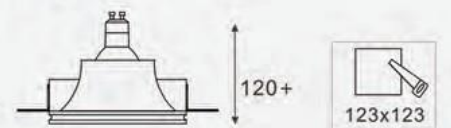


IP20 F CE ROHS

Product Code : C1-11004


Products Code : C1-11027 / C1-11026-1 / C1-11026-2 / C1-11026-3

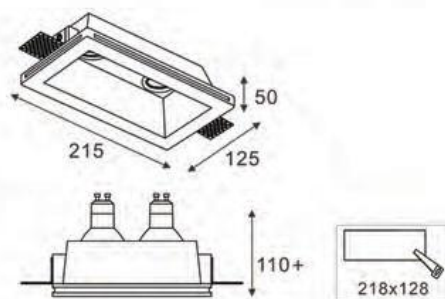

Product Code : C1-11027

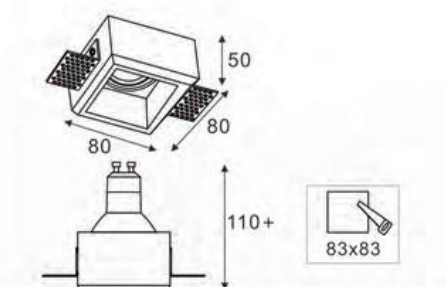

Product Code : C1-11026-1


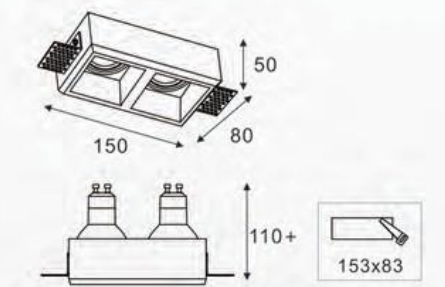


Product Code : C1-11026-2



Product Code : C1-11026-3


Products Code : C1-11030 / C1-11030-2 / C1-1037 / C1- 3002

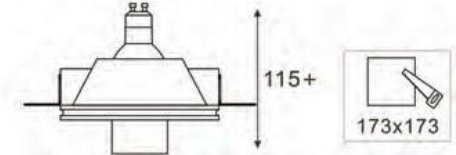


IP20
 F

 ROHS



Product Code : C1-11030

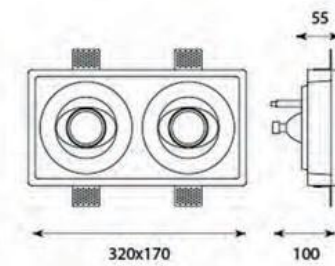

Product Code : C1-11030-2

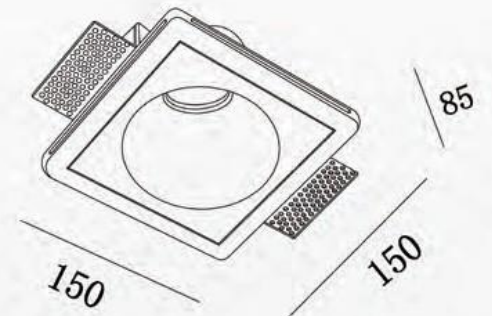


Product Code : C1-1037

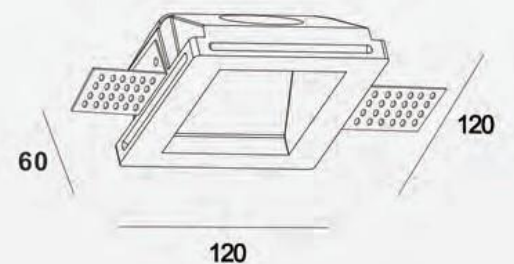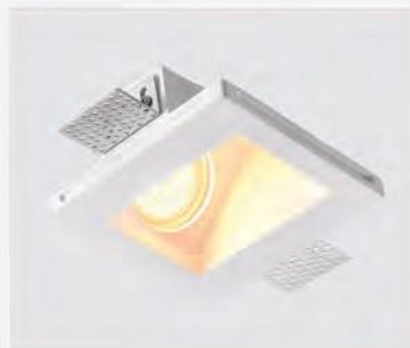

Product Code : C1-3002


Products Code : C1-11011-R23 / C1-11011-R38 / C1-12012

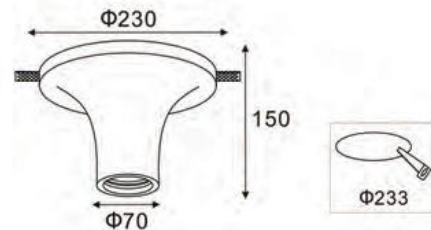

Product Code : C1-11011-R23




Product Code : C1-11011-R38

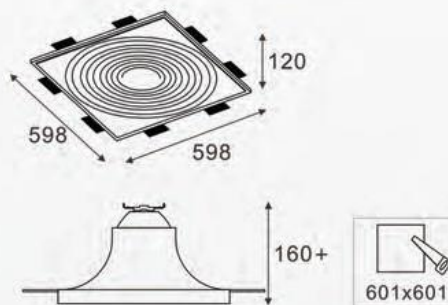


Product Code : C1-12012




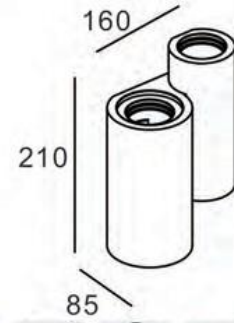


Product Code : W2-8063-2



Product Codea W2-8064-2






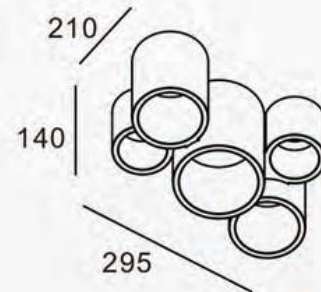



Product Code : C2-4016-5



Product Code : C2-4017-5

i n v i s i b l e f r a m e s

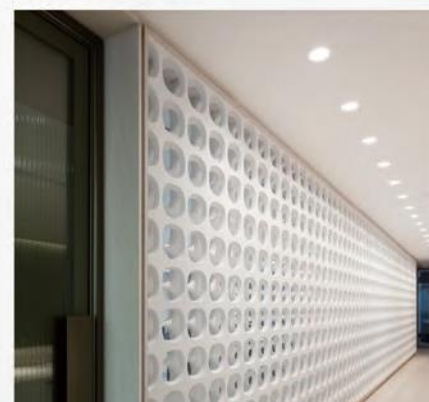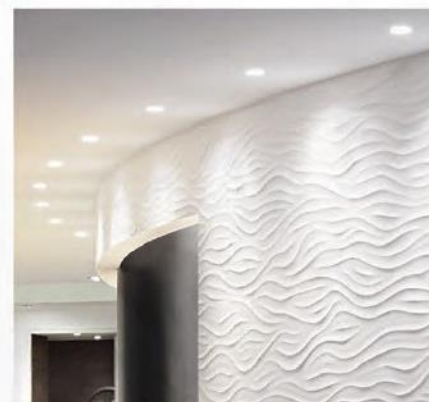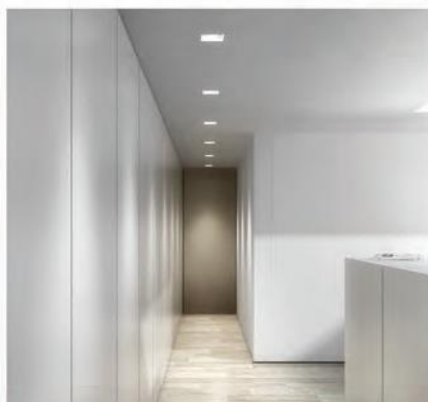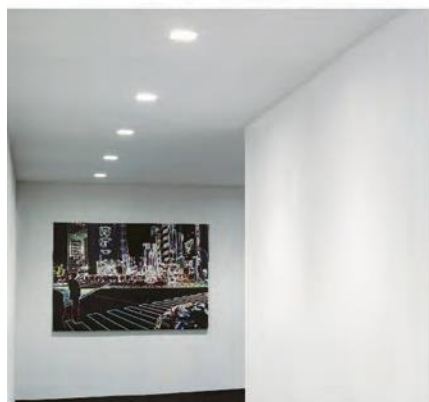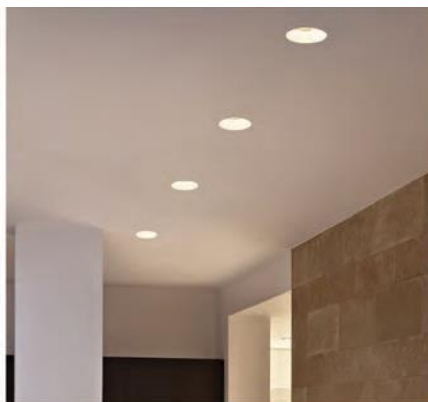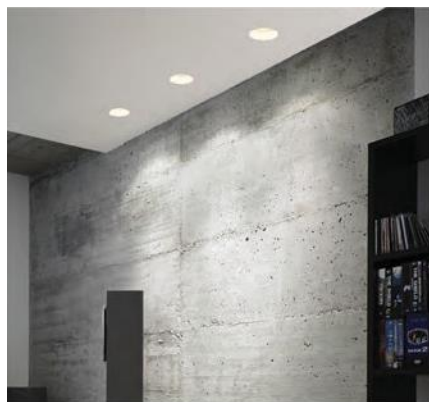






Product Code : W2-8086



Product Code : W2-12011

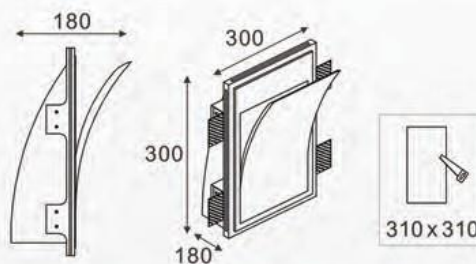


Product Code : W1-11024

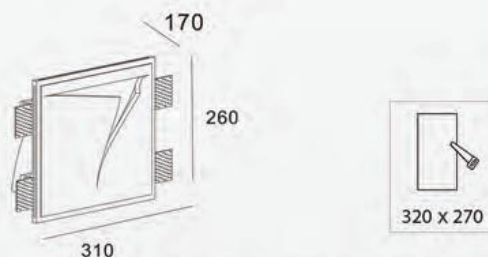


Product Code : W1-11023




Products Code : W2-8060 / W2-12040 / C2-11015-R / C2-11015-SQ




Product Code : W2-8060




Product Code : W2-12040

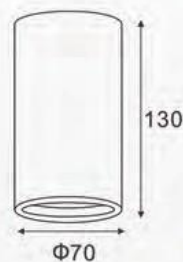


Product Code : C2-11015-R



Product Code : C2-11015-SQ

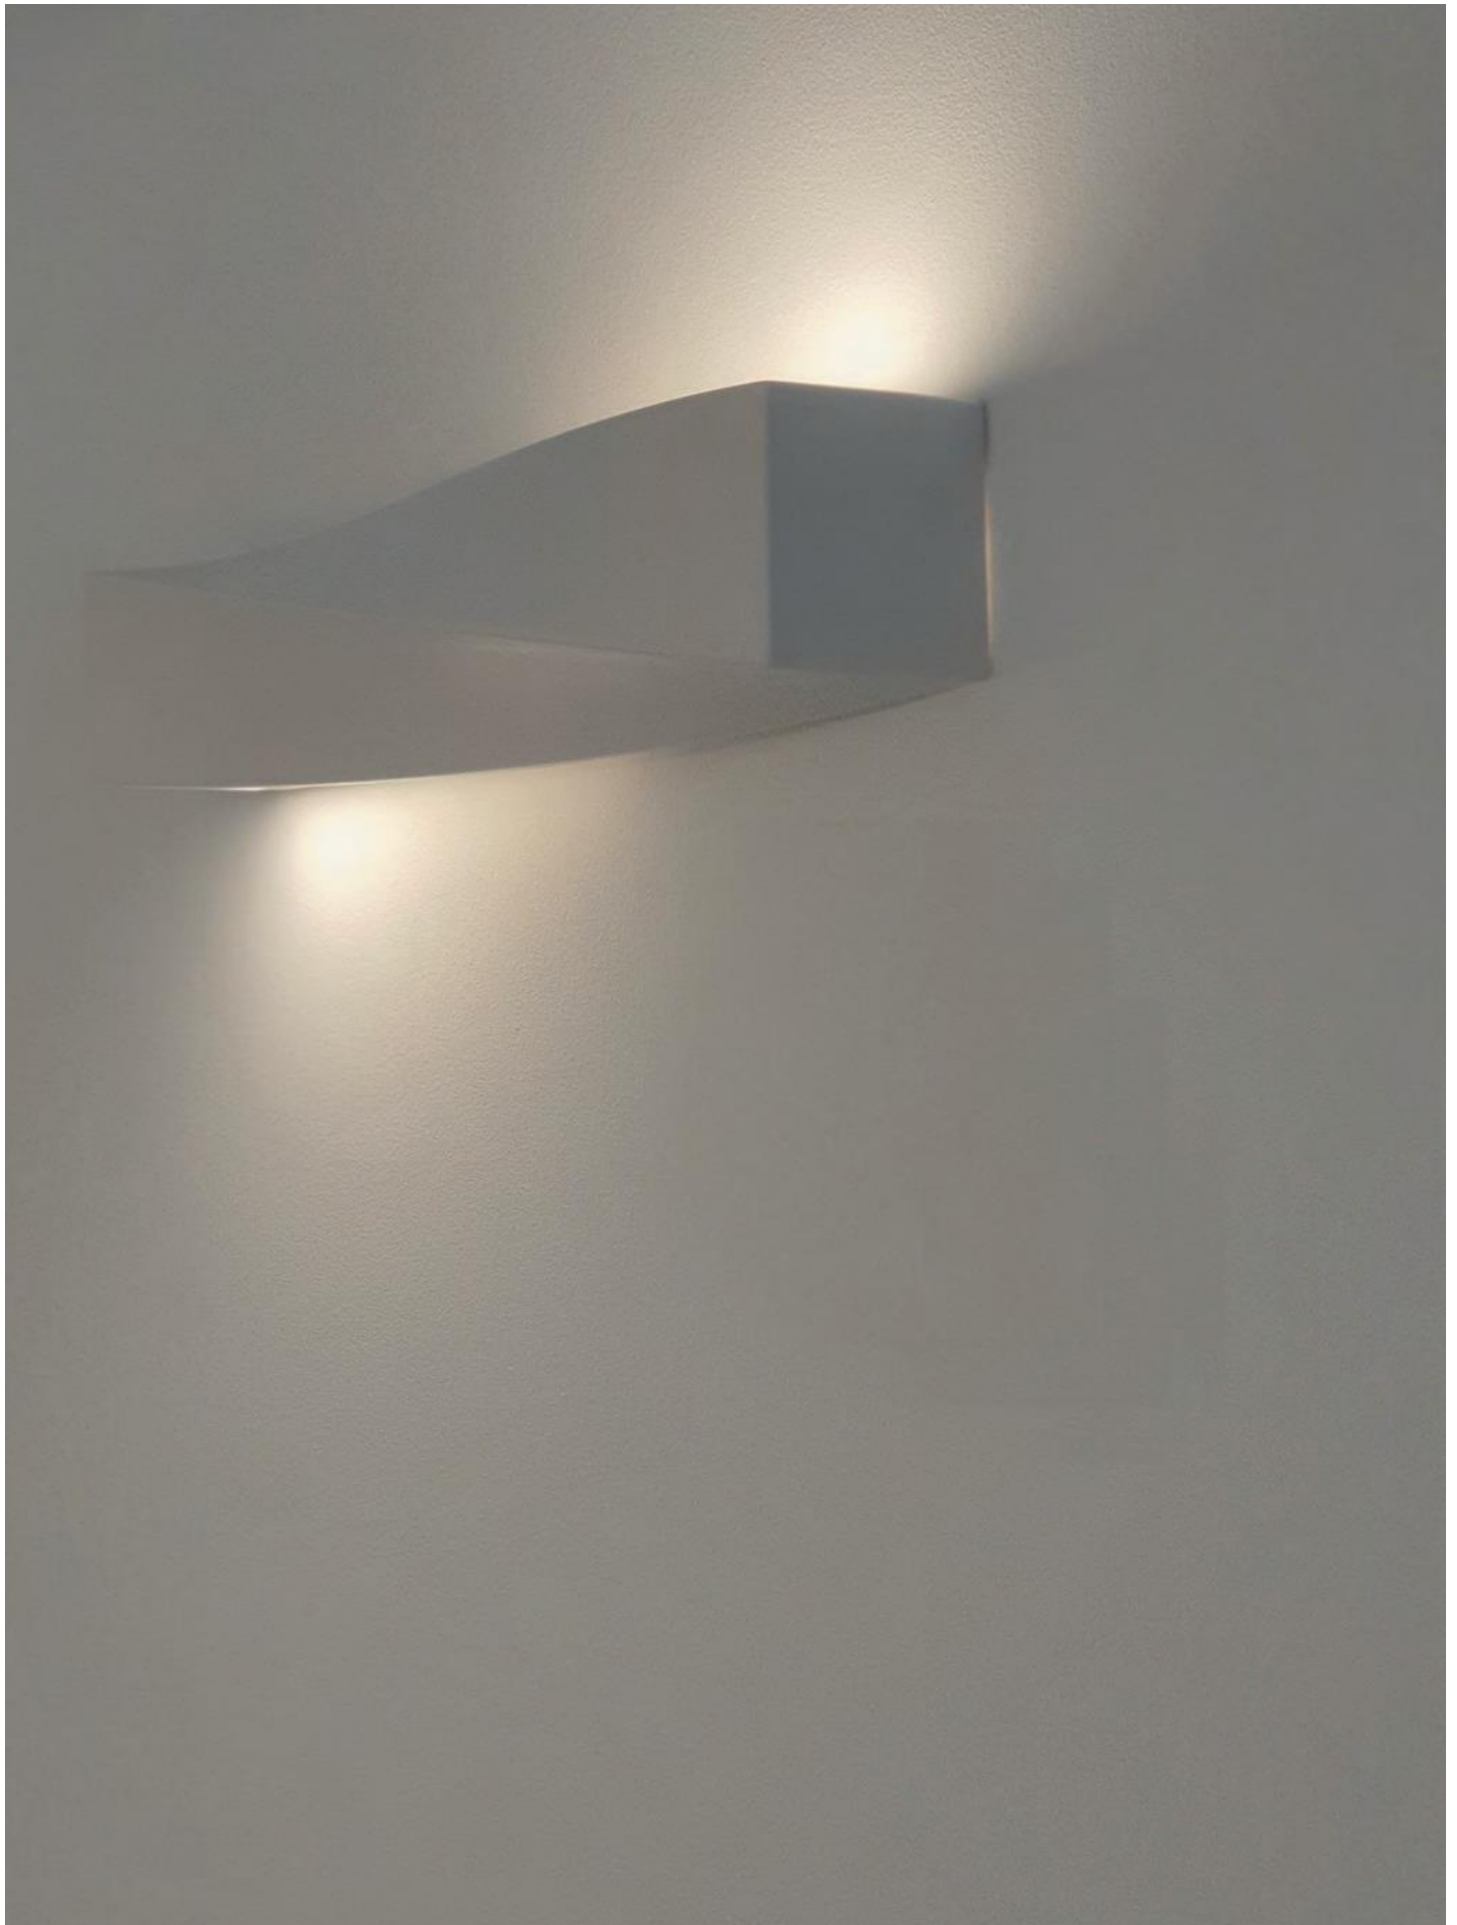


Products Code : W2-4030 / W2-4031 / W2-4032 / W2-4033

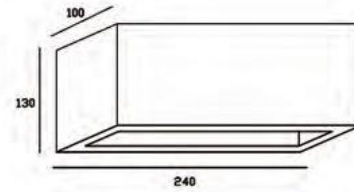


IP20 F $\text{\textcircled{=}}$ CE $\text{\textcircled{G}}$ ROHS

Product Code : W2-4030

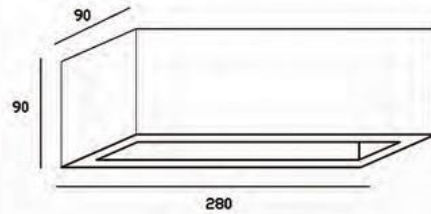


IP20 F $\text{\textcircled{=}}$ CE $\text{\textcircled{G}}$ ROHS

Product Code : W2-4031

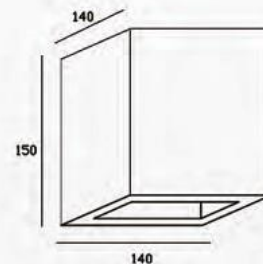

IP20 F $\text{\textcircled{=}}$ CE $\text{\textcircled{G}}$ ROHS


Product Code : W2-4032

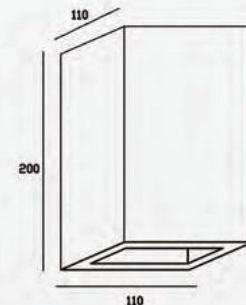



IP20 F $\text{\textcircled{=}}$ CE $\text{\textcircled{G}}$ ROHS

Product Code : W2-4033


Products Code : W1-12012 / W1-3004 / W1-11020

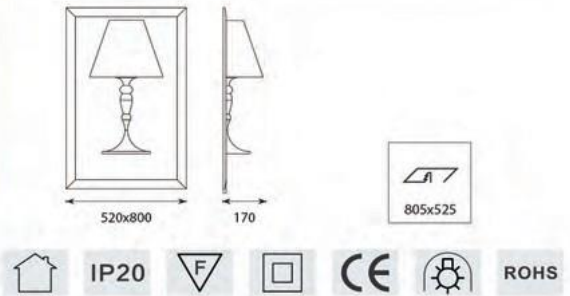

Product Code : W1-12012

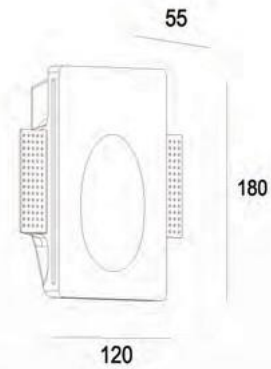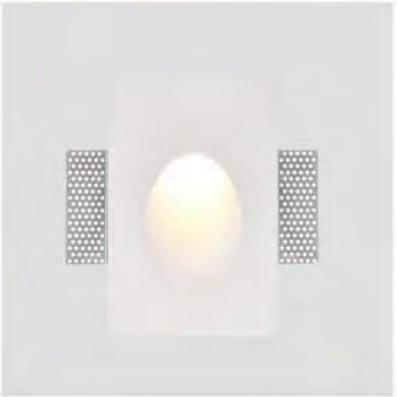

Product Code : W1-3004

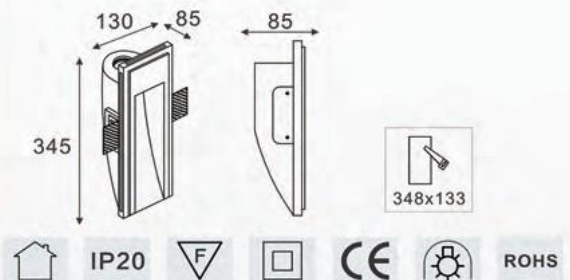


Product Code : W1-11020



Products Code : SPL - Flex Light



Product Code : SPL - TC



Color Temp: 3000k - 4000k

Length: 5 m



Power: 15 w/m

Luminous: 1600 lm/m

CRI > 80



Product Code : SPL - TB



Color Temp: 3000k - 4000k - 6000k

Length: Customized



Power: 1.5 w/m

Luminous: 700 lm/m

CRI > 80



Product Code : SPL - Tube 360




Color Temp: 4000 k

Length: 5 m

Power: 18 w/m


Luminous: 1200 lm/m

CRI > 80

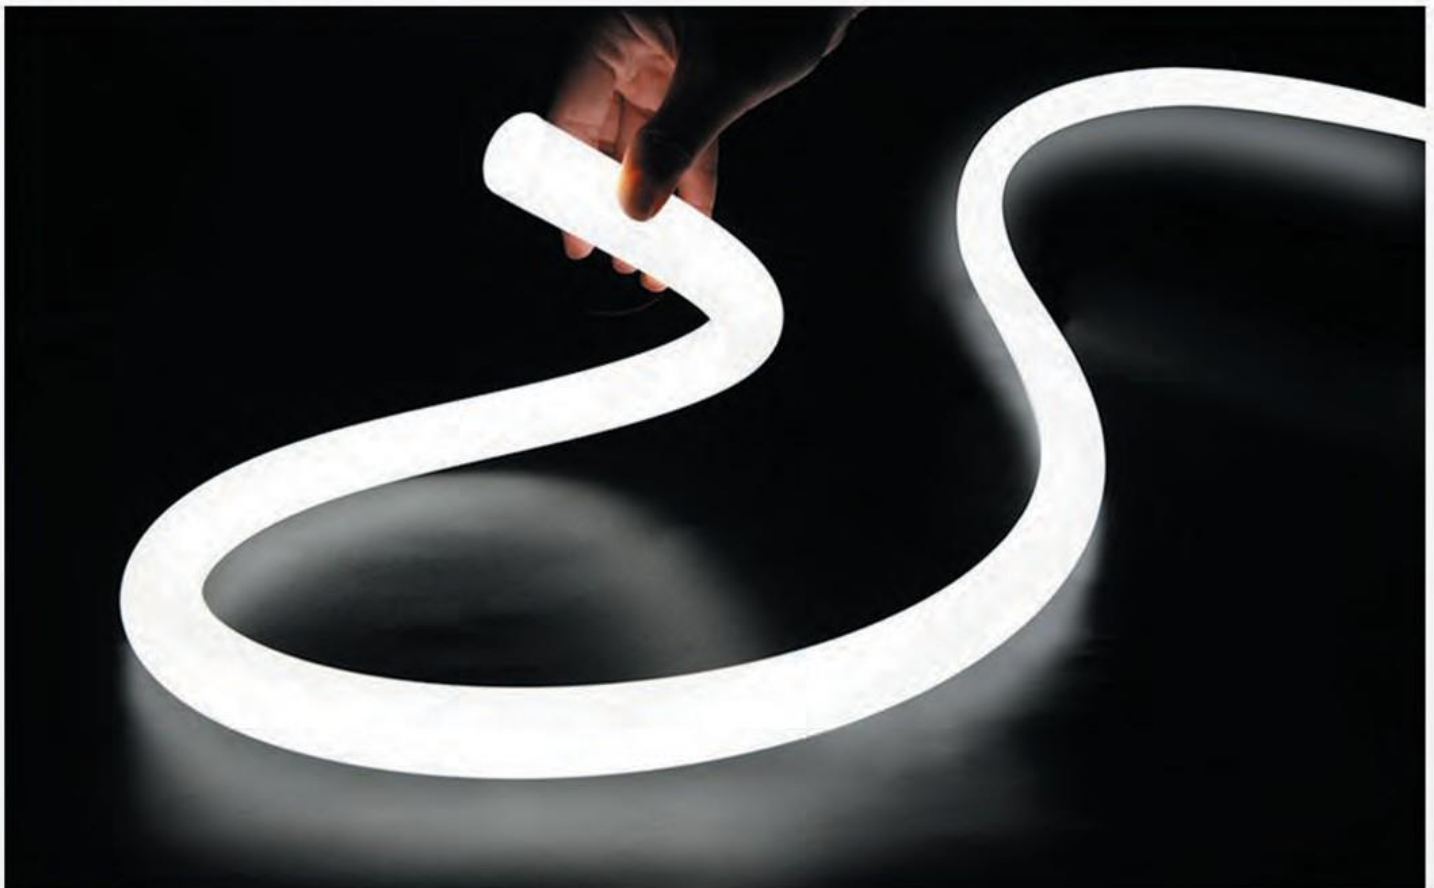



Products Code : SPL - Point To Point Line Light

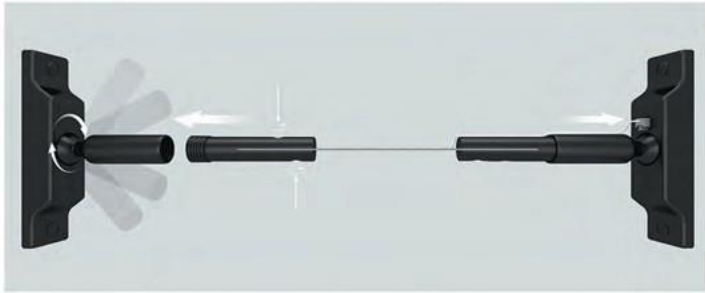

Product Code : SPL - Point To Point Line Light


Power: 15 w/m


Color Temp: 3000k - 4000k

Luminous: 1500 lm/m

Length: 1m - 6m

CRI > 90

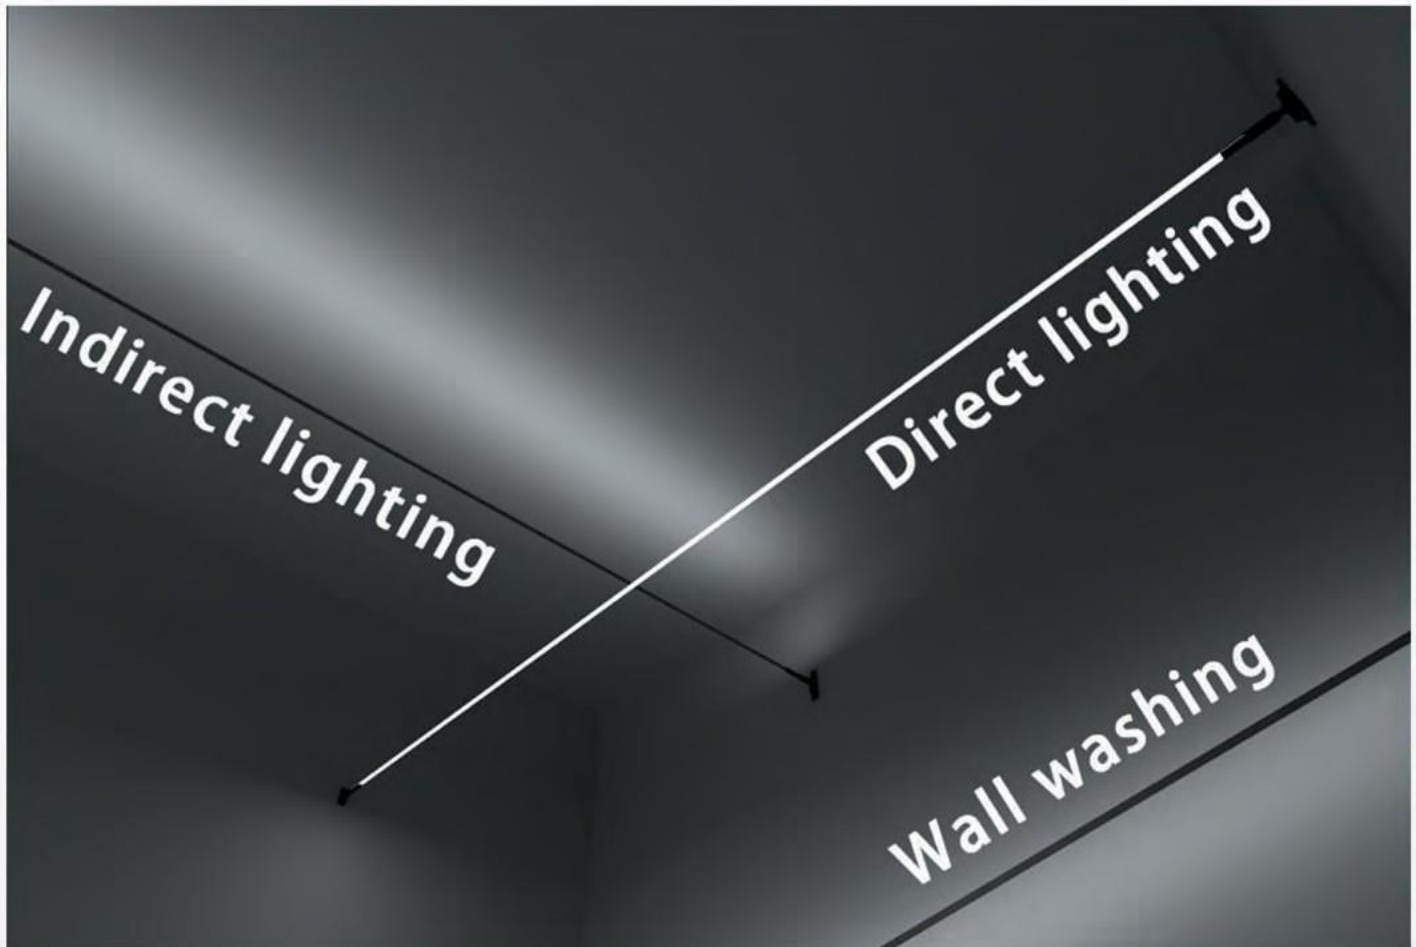

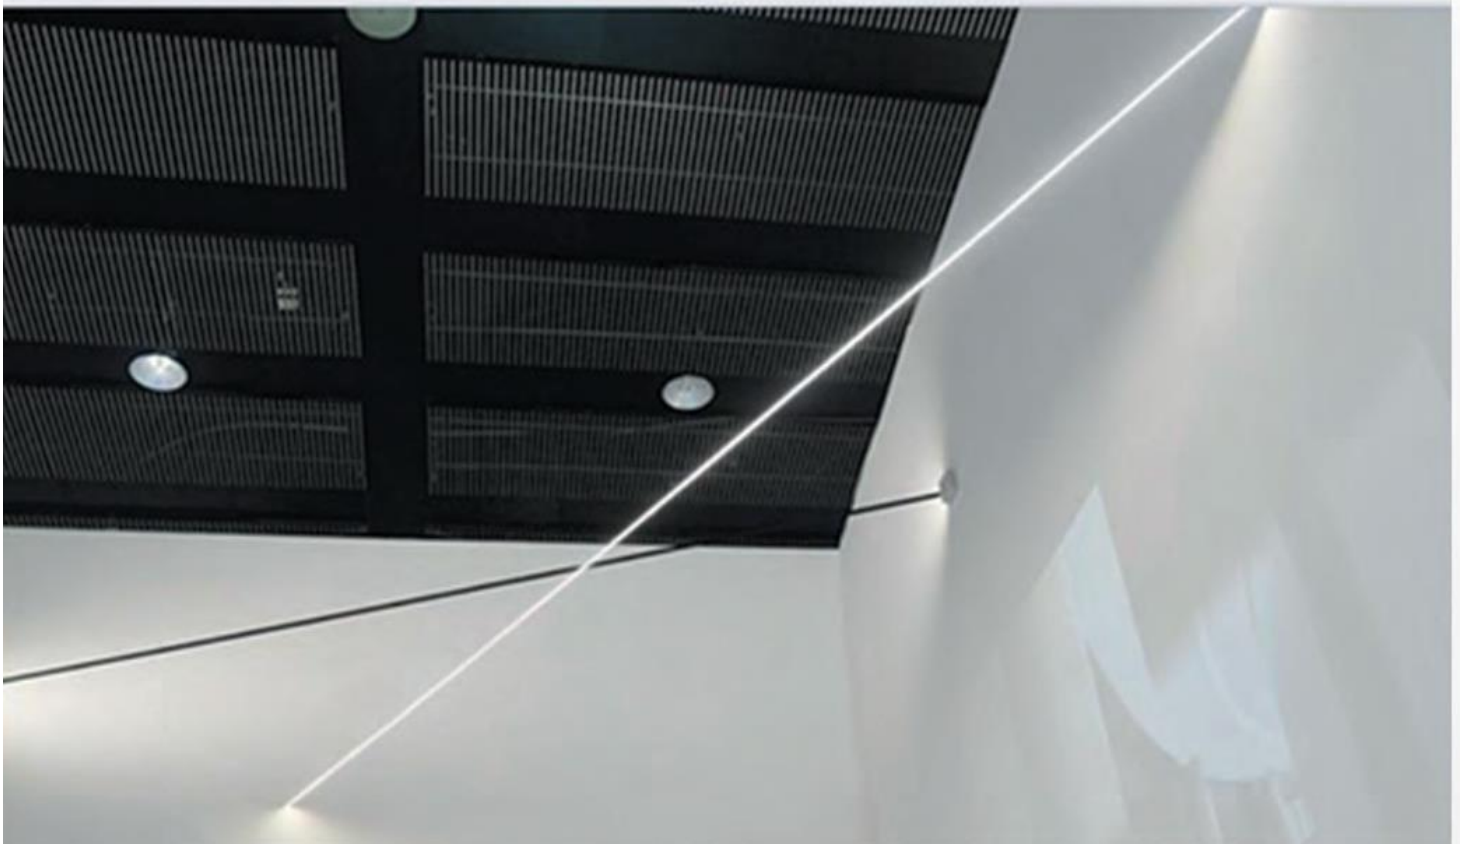

Invisible Frames

Wide range of plaster frames which become part of ceiling or walls to bring attention only into architecture





نوران
NOORAN