



نوران


NOORAN

Magnetic Multi Track Light



Magnetic Multi Track Light

Nooran lighting

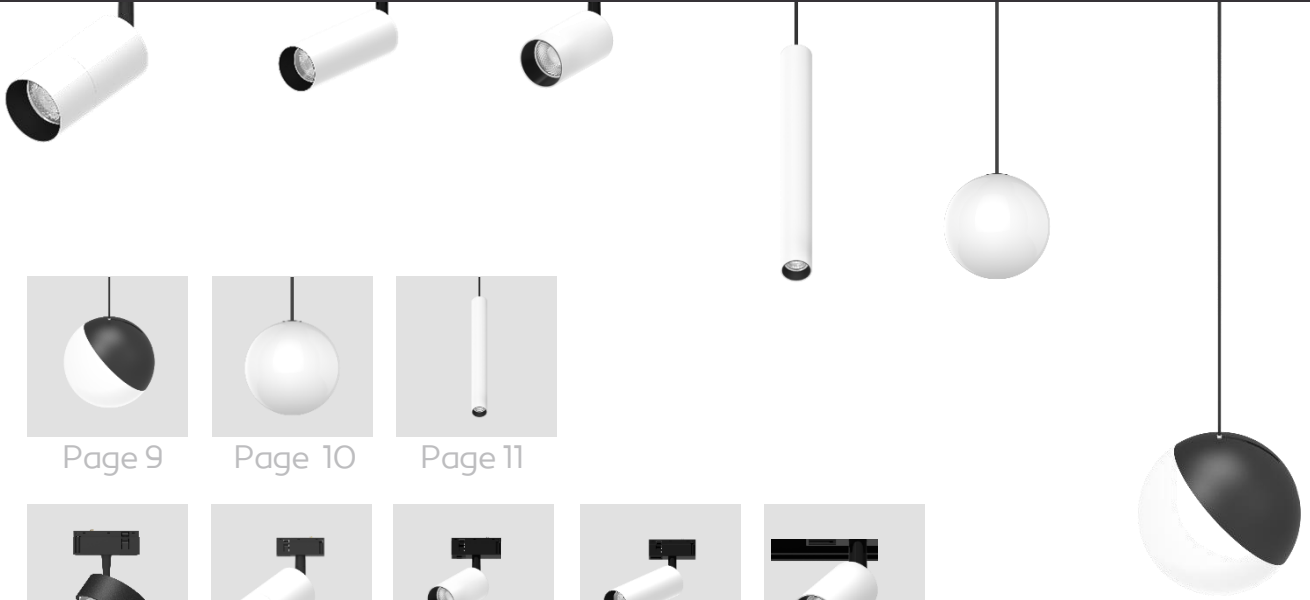

Page 9



Page 10



Page 11



Page 12



Page 13




Page 14




Page 15



Page 16




Page 17




Page 18




Page 19



Page 20



Page 21



Page 22



Page 23



Page 24



Page 25




Page 26




Page 27




Page 28



Page 29



Page 30




Page 31




Page 32

Installation exploded view

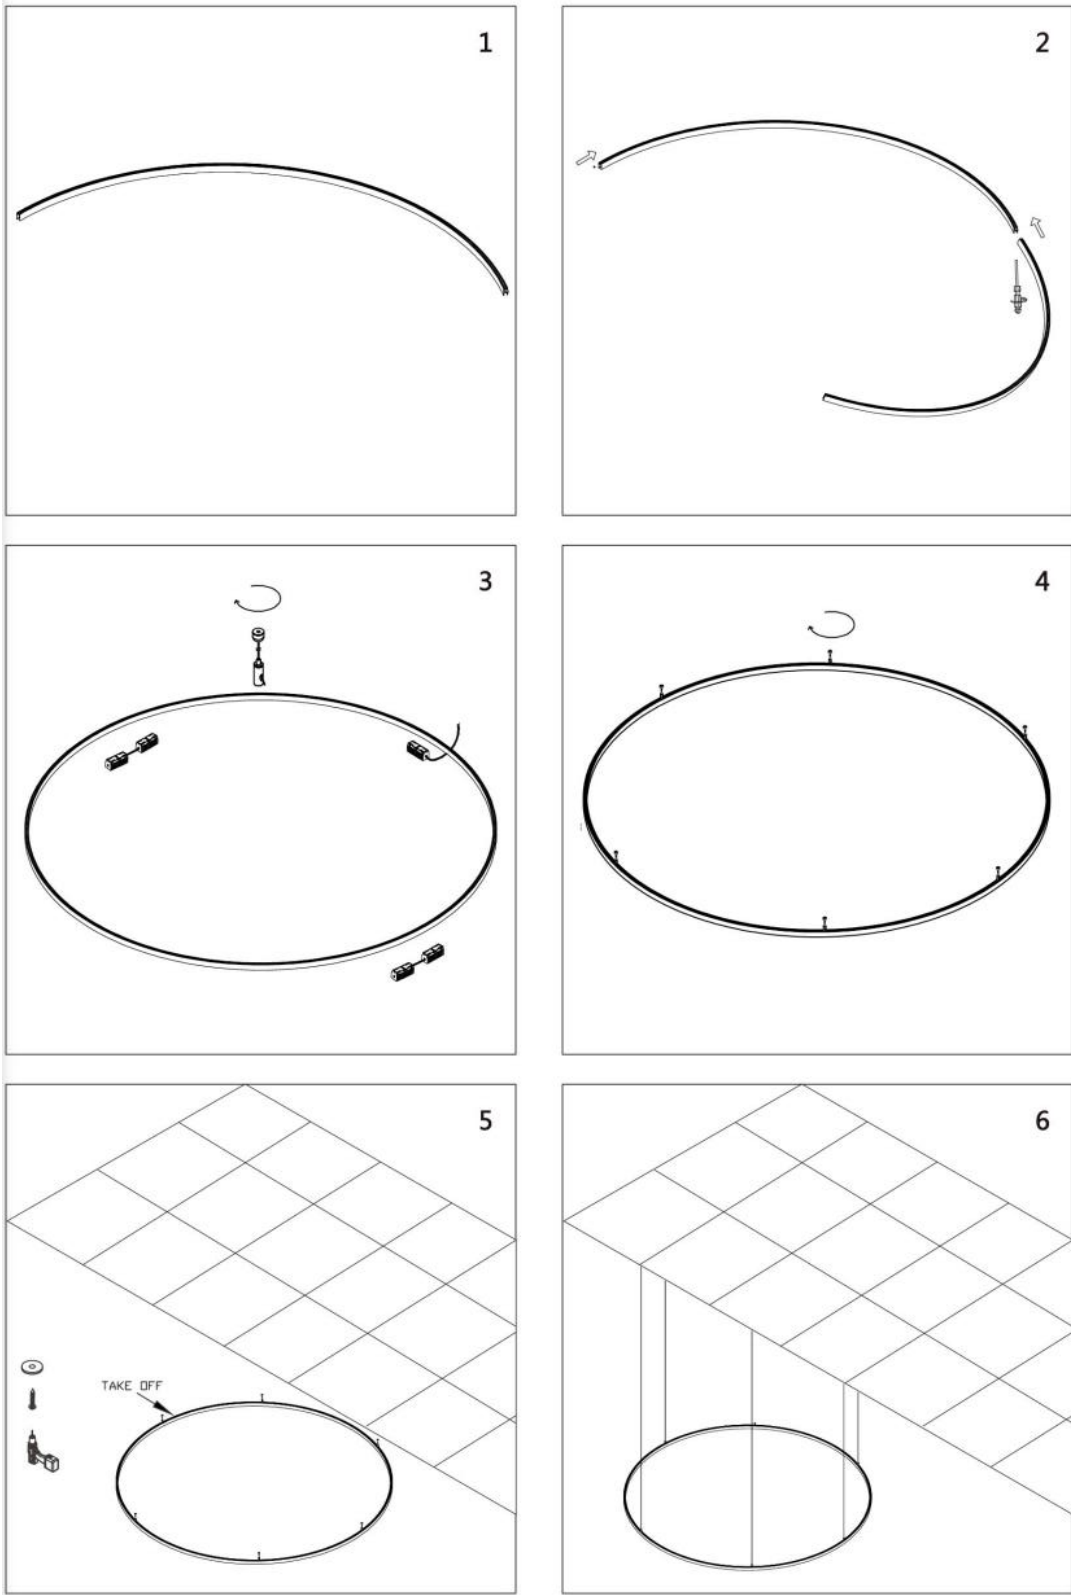

Description of accessories

Round Profile ▶



Diameter	Code No.	Color
2m	T192	White
	T193	Black
3m	T194	White
	T195	Black

Track Installation Connectors & Accessories ▶



T173 (BLK) / T202 (WHT)




T176 (BLK) / T203 (WHT)





T167 (BLK)

Installation exploded view

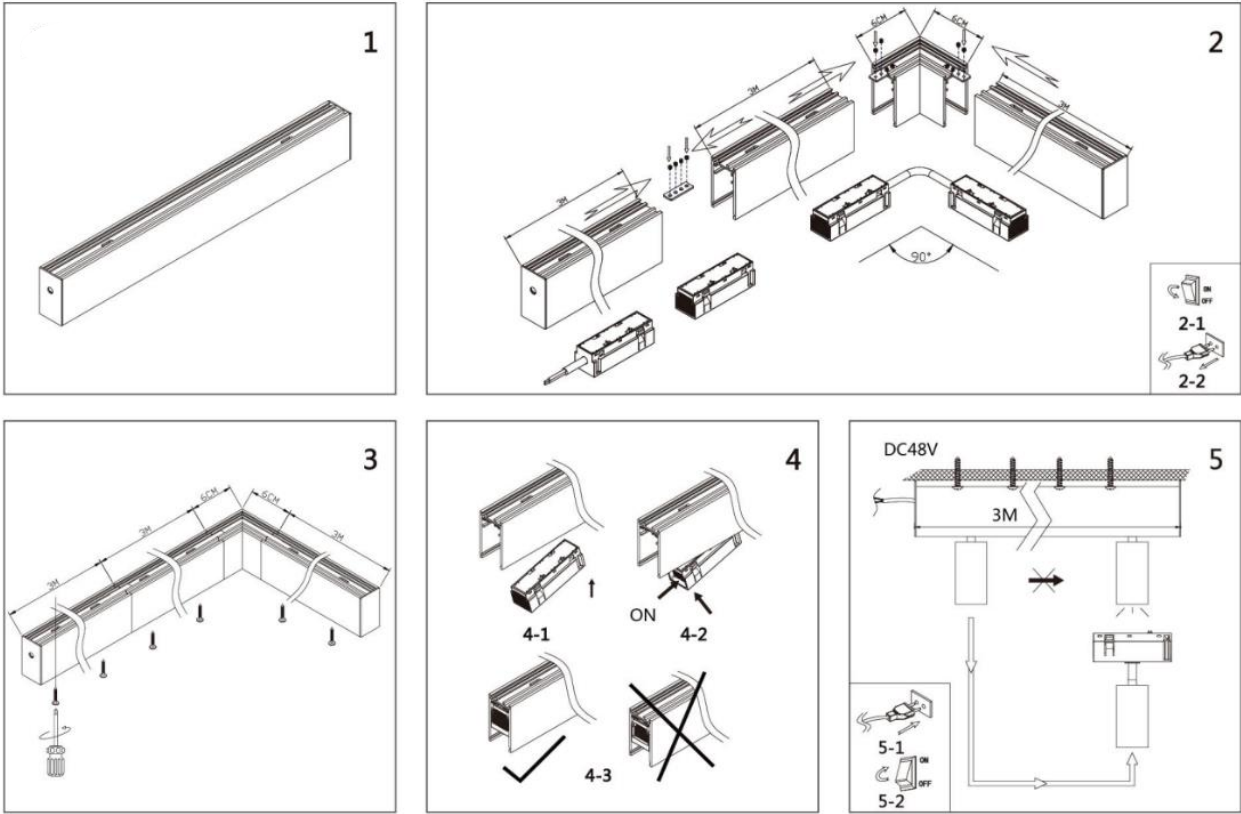


Description of accessories

Surface Track ▶

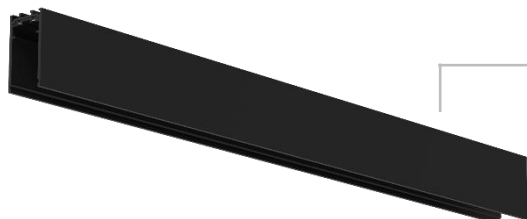

Diameter	Code No.	Color
1000mm	T161	Black
2000mm	T162	Black
	T198	White
3000mm	T208	Black
	T207	White


Track Installation Connectors & Accessories




T173 (BLK) / T202 (WHT)




T176 (BLK) / T203 (WHT)




T165 (BLK) / T199 (WHT)



T170 (BLK) / T200 (WHT)




T183 (BLK) / T273 (WHT)



T184 (BLK) / T204 (WHT)

Description of accessories

Recessed Track ▶



Diameter	Code No.	Color
1000mm	T157	Black
2000mm	T158	Black
	T196	White
3000mm	T206	Black
	T205	White


Track Installation Connectors & Accessories ▶




T173 (BLK) / T202 (WHT)



T176 (BLK) / T203 (WHT)



T159 (BLK) / T197 (WHT)



T170 (BLK) / T200 (WHT)




Code: T254 (WHT) / T255 (BLK)

Input Voltage	DC48
Power(Watts)	30W
Lumen	2182lm
Lamp holder	Aluminum PCB
Light Source	CREE 3030
Beam Angle	101°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□I □II ■III
Guarantee	3 years
Warranty	5 years
Certificates	CE . ROHS




Optic Data

Luminous Intensity Distribution Curve

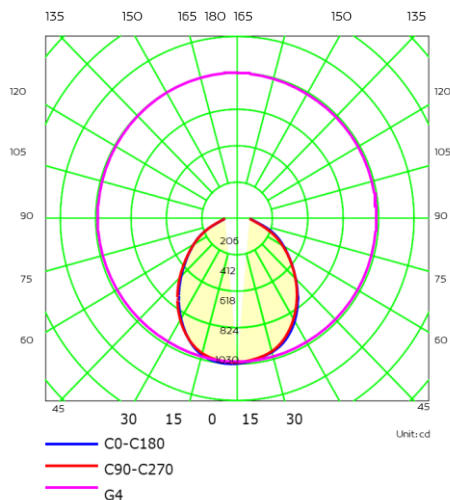


AAI Figure

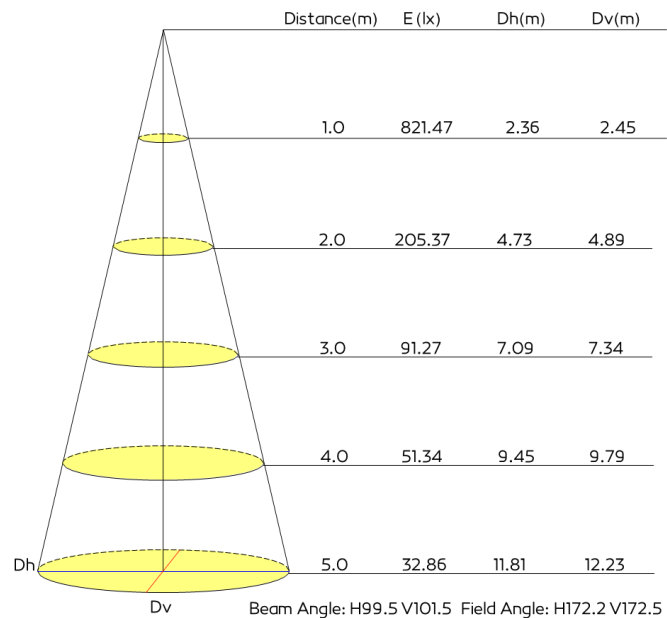




Code: T260 (WHT) / T261 (BLK)

Input Voltage	DC48
Power(Watts)	4.5W
Lumen	213.6lm
Lamp holder	Flexible Lamp Belt
Light Source	Bridgelux 2835
Beam Angle	112°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Glass
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□I □II ■III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

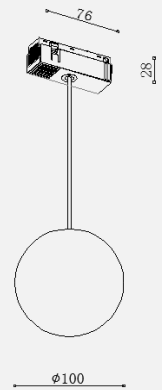


Optic Data

Luminous Intensity Distribution Curve

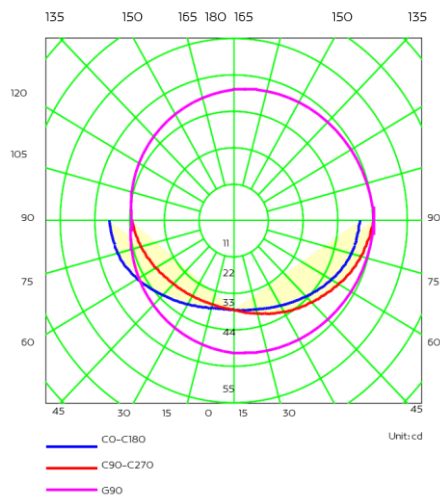

AAI Figure

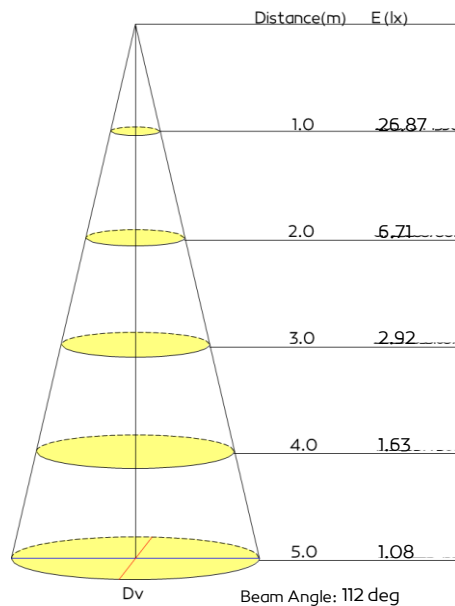




Code: T246 (WHT) / T247 (BLK)

Input Voltage	DC48 350MA
Power(Watts)	6.7W
Lumen	522lm
Lamp holder	Ceramic PCB
Light Source	CREE CXA 1304
Beam Angle	60°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□I □II ■III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

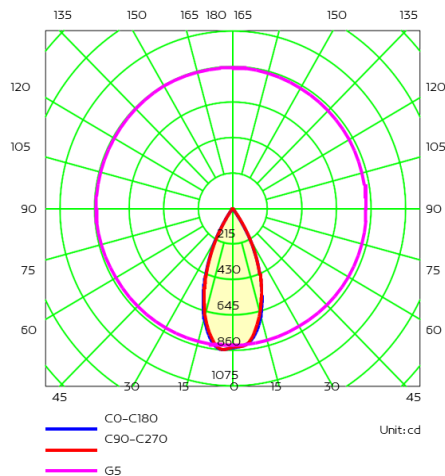


AAI Figure

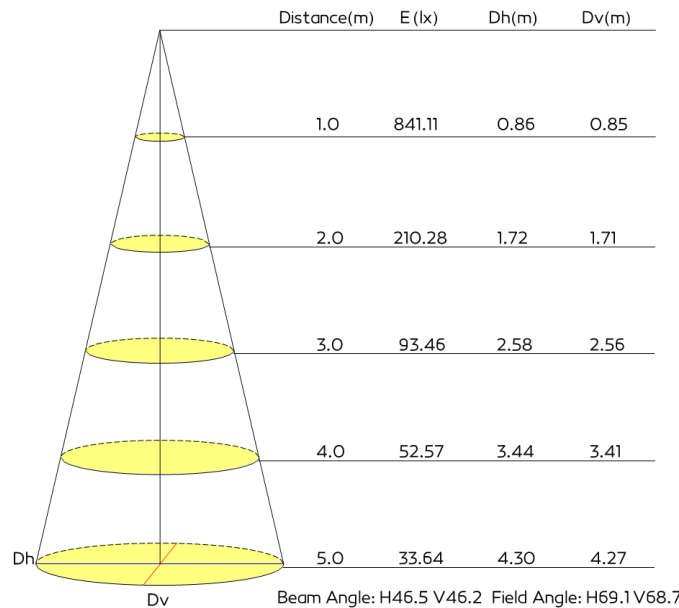




Code: T191 (BLK)

Input Voltage	DC48
Power(Watts)	7.5W
Lumen	552lm
Lamp holder	Ceramic PCB
Light Source	CREE CXA1304 (9V)
Beam Angle	38°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	BLK
Wire connection way	Track Adaptor
Class	□I □II ■III
Guarantee	3 years
Warranty	5 years
Certificates	CE . ROHS




Optic Data

Luminous Intensity Distribution Curve

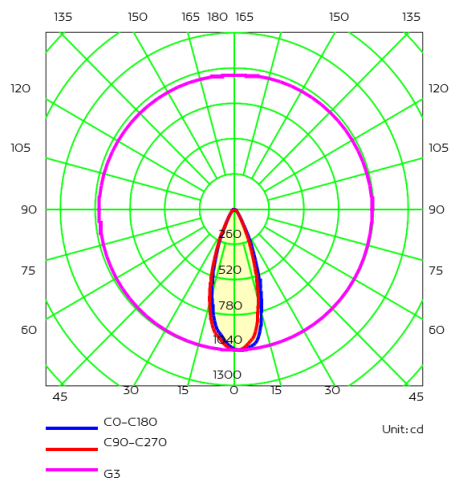


AAI Figure

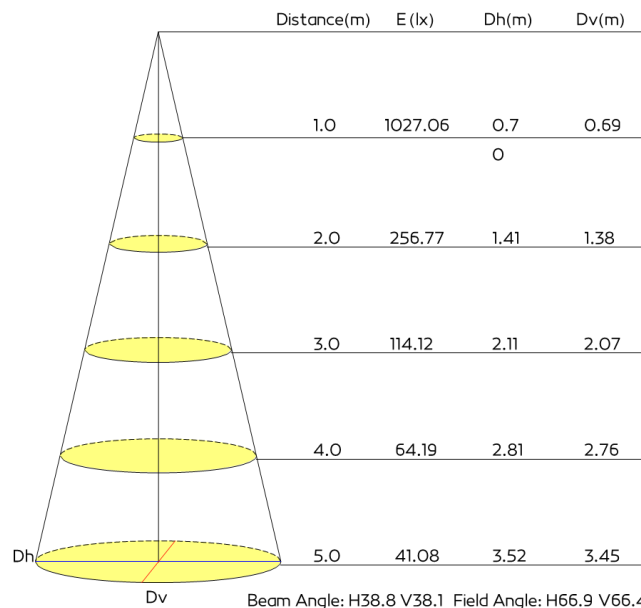




Code: T242 (WHT) / T243 (BLK)

Input Voltage	DC48
Driver	DC 700MA
Power(Watts)	25W
Lumen	1808lm-1927lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux V9
Beam Angle	Adjustable 15° to 50°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

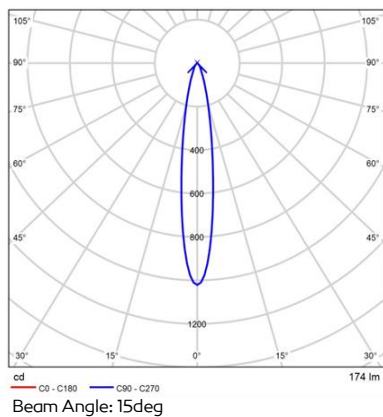


AAI Figure

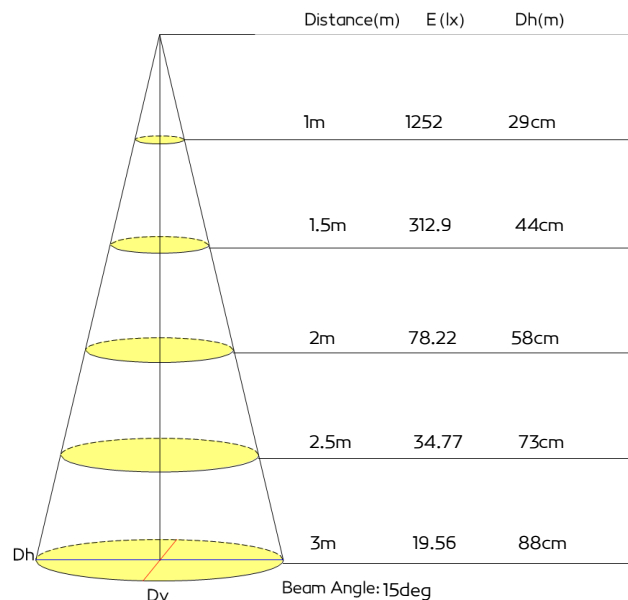




Code: T232 (WHT) / T233 (BLK)

Input Voltage	DC48 350MA
Power(Watts)	13W
Lumen	1054lm
Lamp holder	Ceramic PCB
Light Source	CREE CXA1512
Beam Angle	30°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□ I □ II ■ III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

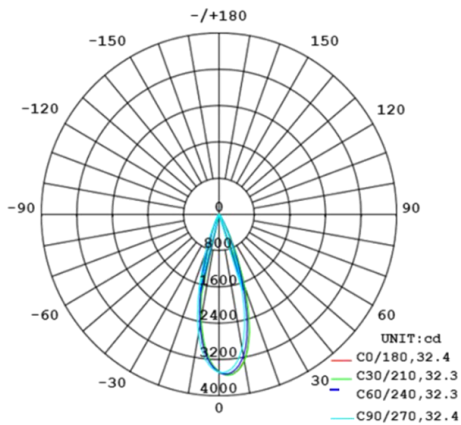


AAI Figure

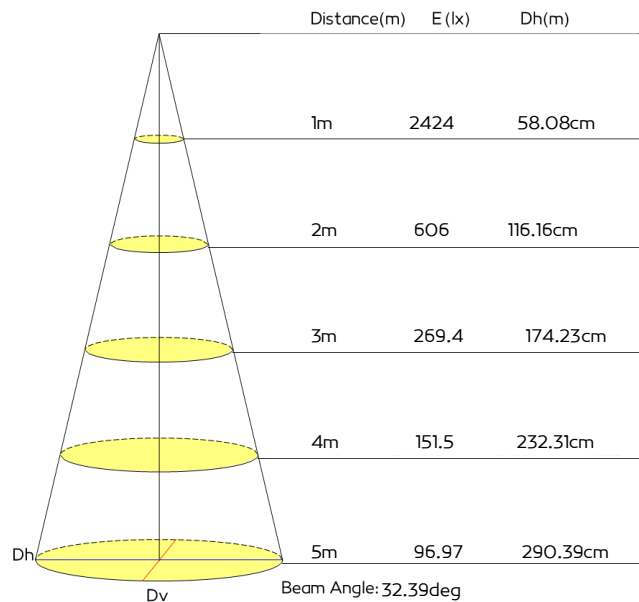




Code: T234 (WHT) / T235 (BLK)

Input Voltage	DC48 500MA
Power(Watts)	18.5W
Lumen	1890lm
Lamp holder	Ceramic PCB
Light Source	CREE CXB1512
Beam Angle	30°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

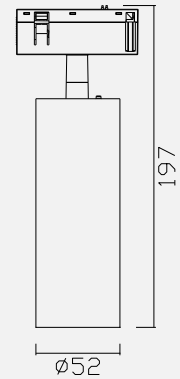


Optic Data

Luminous Intensity Distribution Curve

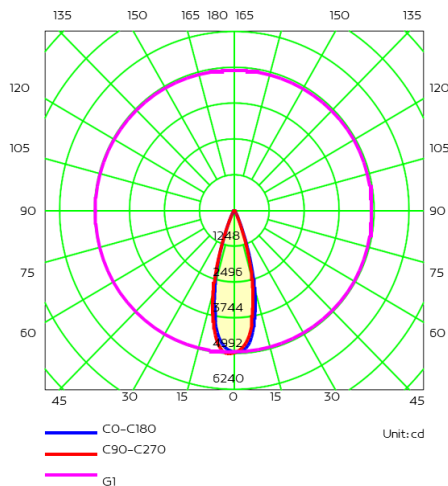


AAI Figure

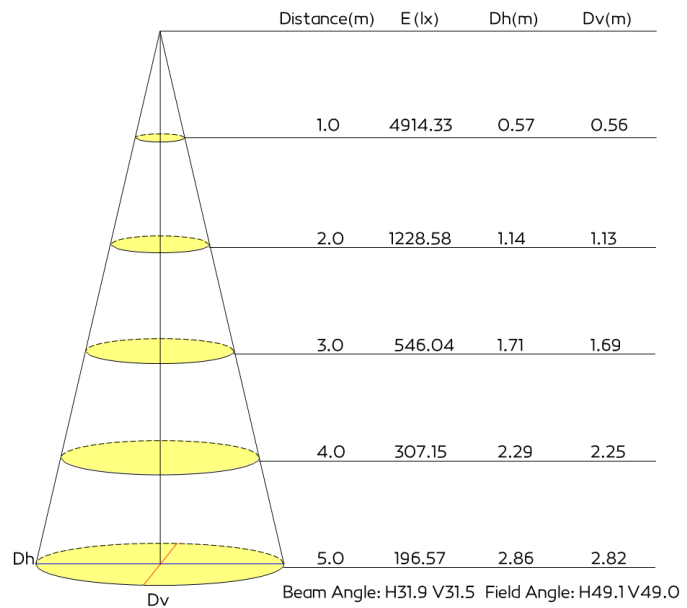




Code: T181 (BLK)

Input Voltage	DC48 700MA
Power(Watts)	6.7W
Lumen	466lm
Lamp holder	Ceramic PCB
Light Source	CREE CXA1304
Beam Angle	27°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

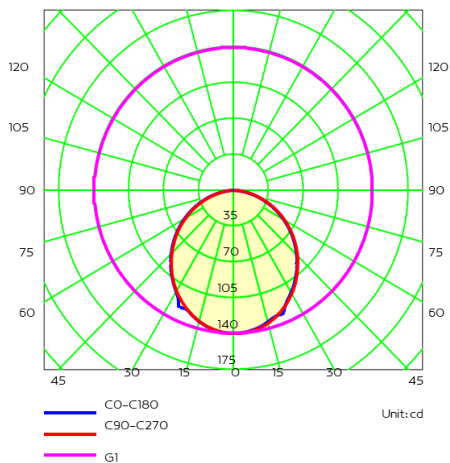



AAI Figure

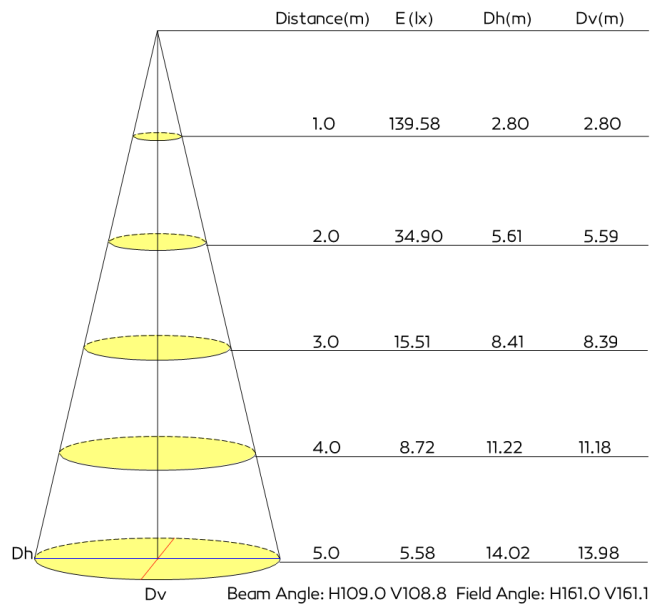




Code: T265 (WHT) / T266 (BLK)

Input Voltage	DC48
Power(Watts)	10W
Lumen	780lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	110°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

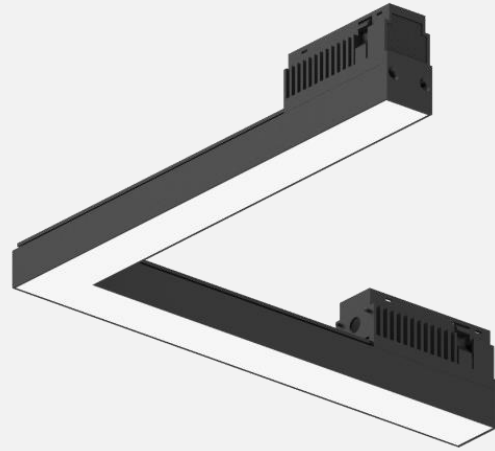


Optic Data

Luminous Intensity Distribution Curve

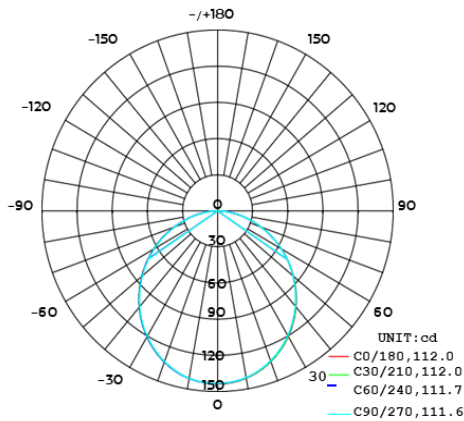


AAI Figure

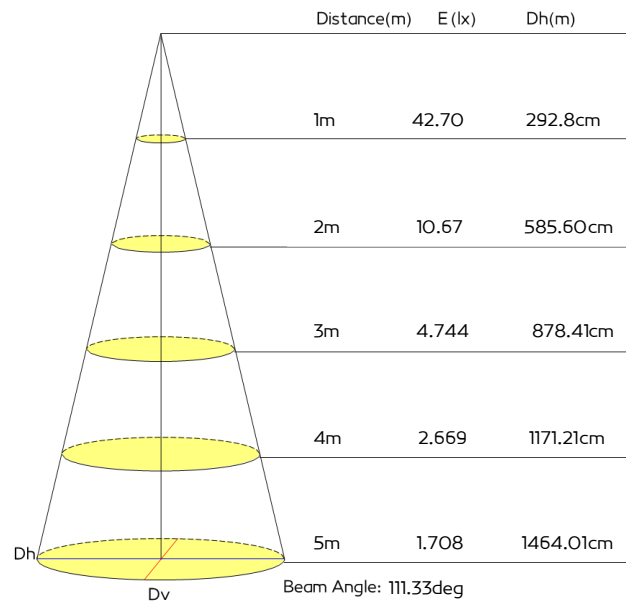




Code: T238 (WHT) / T239 (BLK)

Input Voltage	DC48 350MA
Power(Watts)	6W
Lumen	384.5lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux 2835
Beam Angle	110°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□ I □ II ■ III
Guarantee	3 years
Warranty	5 years
Certificates	CE . ROHS

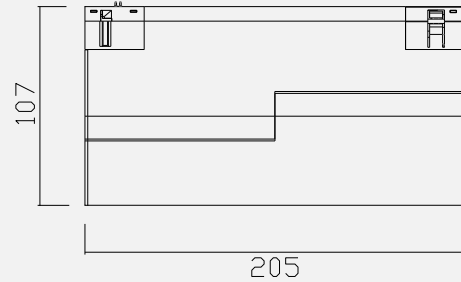


Optic Data

Luminous Intensity Distribution Curve

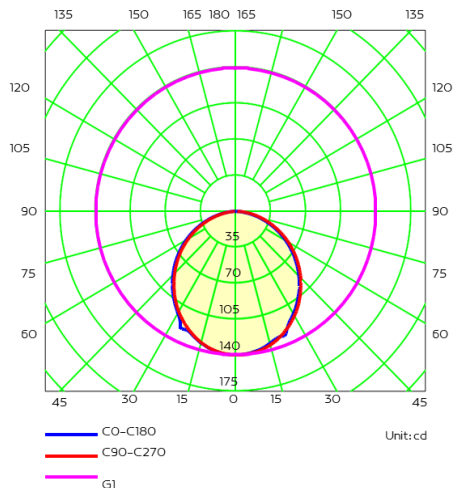


AAI Figure

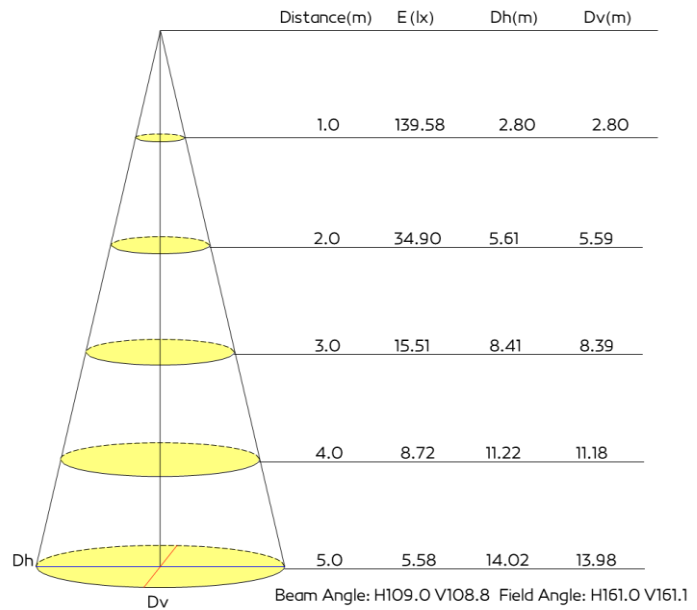




Code: T177 (BLK)

Input Voltage	DC48 350MA
Power(Watts)	5W
Lumen	384lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	110°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

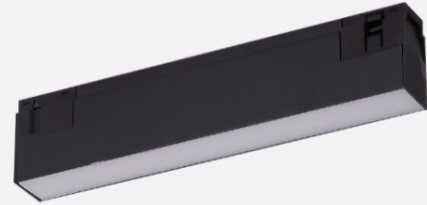


Optic Data

Luminous Intensity Distribution Curve

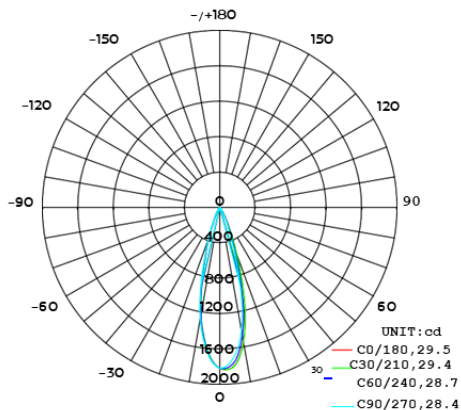

AAI Figure

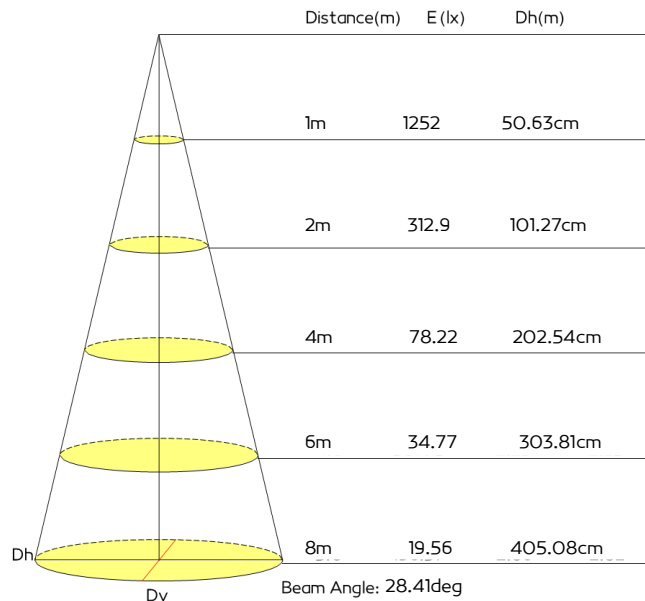




Code: T131 (BLK) / T262 (WHT)

Input Voltage	DC48 350MA
Power(Watts)	10.2W
Lumen	783lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	110°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□ I □ II ■ III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

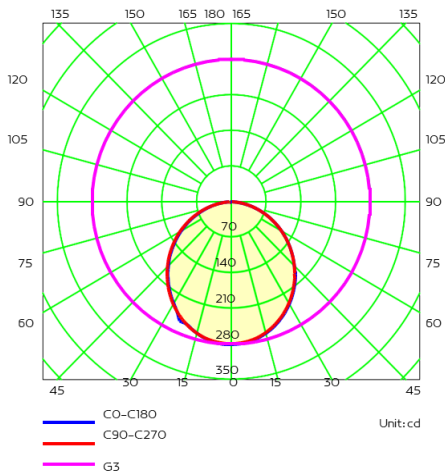


AAI Figure

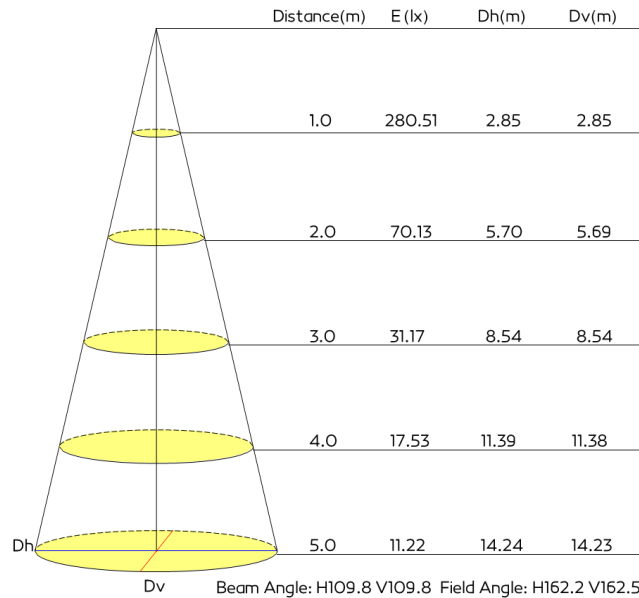




Code: T244 (WHT) / T245 (BLK)

Input Voltage	DC48 500MA
Power(Watts)	18W
Lumen	1470lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	110°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□I □II ■III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

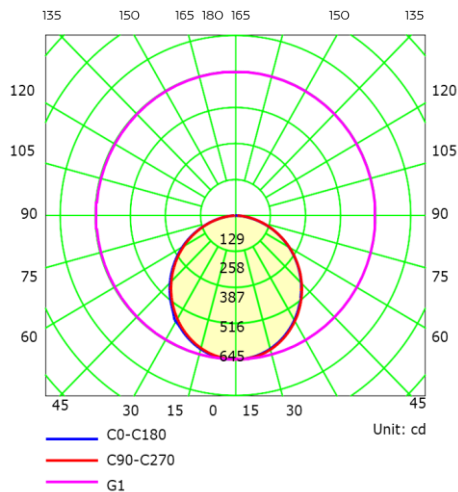


AAI Figure

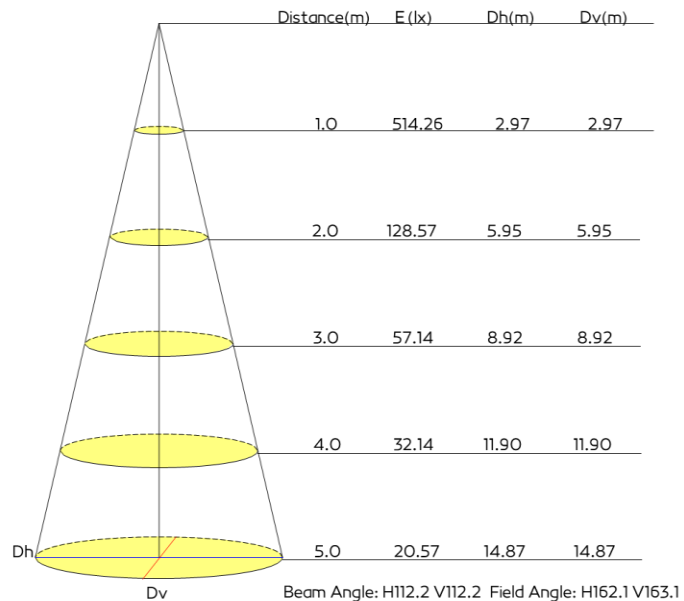




Code: T189 (BLK) / T264 (WHT)

Input Voltage	DC48 350MA
Power(Watts)	10W
Lumen	584.1lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	95°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□ I □ II ■ III
Guarantee	3 years
Warranty	5 years
Certificates	CE . ROHS

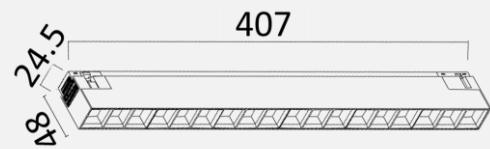


Optic Data

Luminous Intensity Distribution Curve

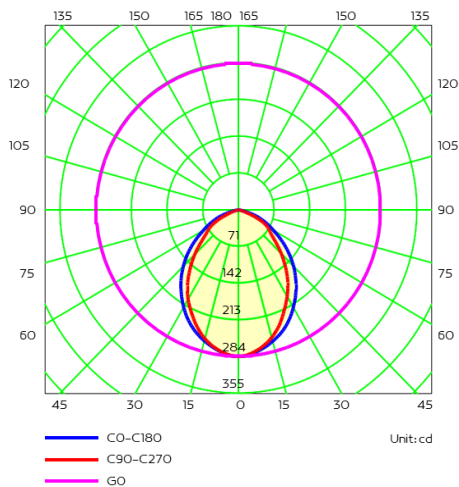


AAI Figure

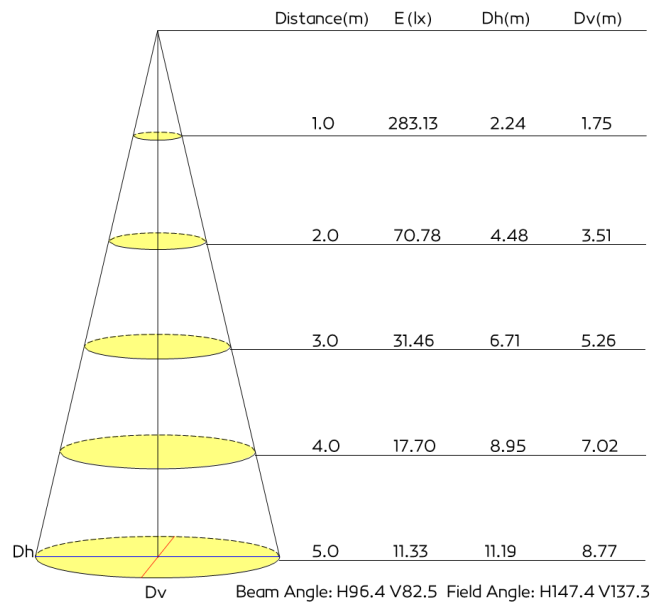




Code: T186 (BLK)

Input Voltage	DC48 350MA
Power(Watts)	10W
Lumen	526lm
Lamp holder	Aluminum PCB
Light Source	CREE XPE-2
Beam Angle	23°x43° Assymetric
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

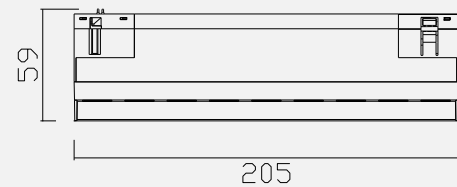


Optic Data

Luminous Intensity Distribution Curve

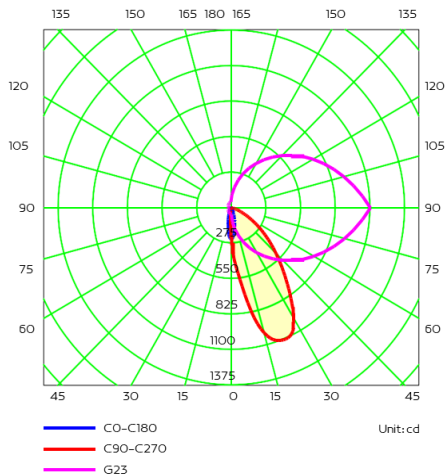

AAI Figure

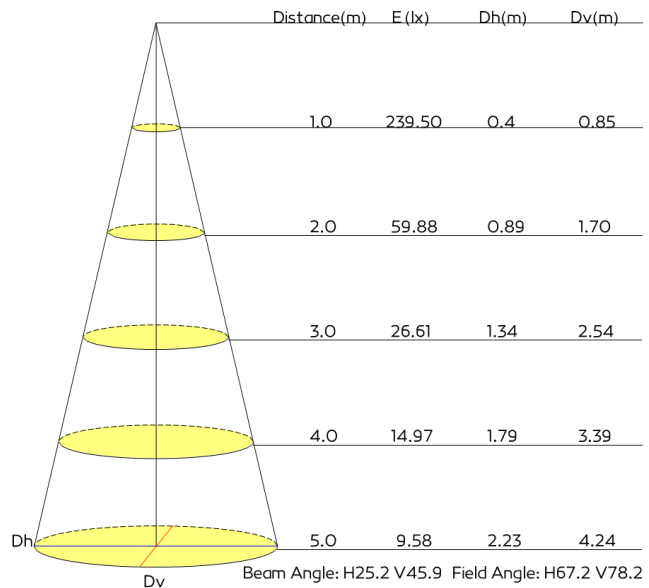




Code: T248 (WHT) / T249 (BLK)

Input Voltage	DC48 350MA
Power(Watts)	9x1.1W (10W)
Lumen	849lm
Lamp holder	Aluminum PCB
Light Source	CREE XPE-2
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

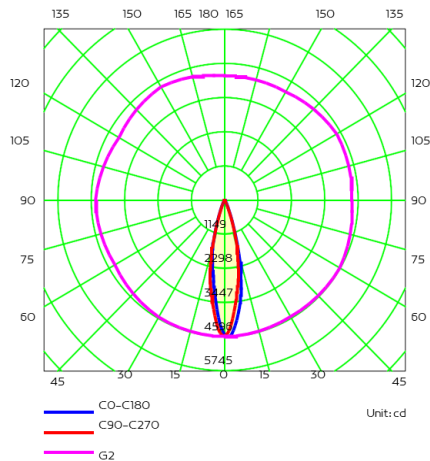


AAI Figure

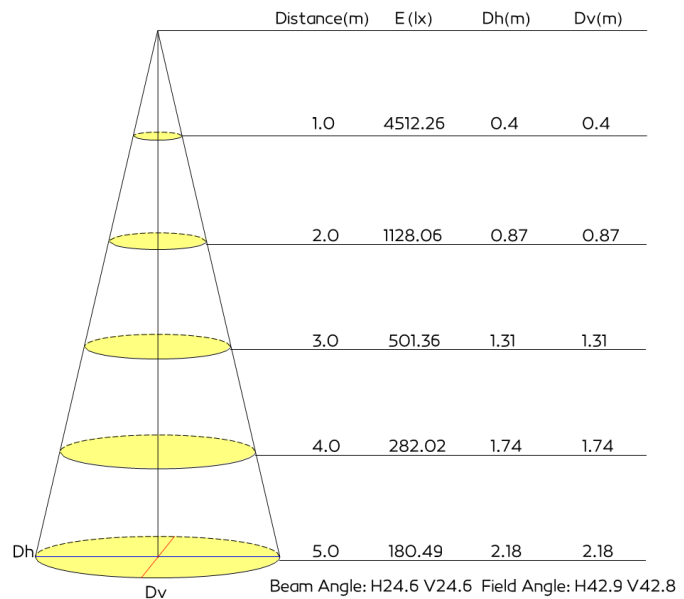




Code: T250 (WHT) / T251 (BLK)

Input Voltage	DC48 700MA
Power(Watts)	18x1.1W (20W)
Lumen	1697lm
Lamp holder	Aluminum PCB
Light Source	CREE XPE-2
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

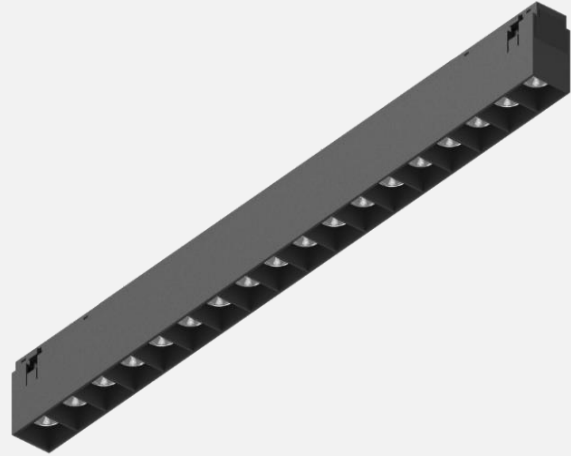


Optic Data

Luminous Intensity Distribution Curve

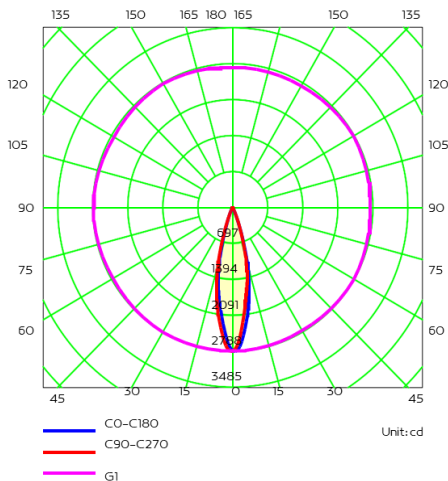


AAI Figure

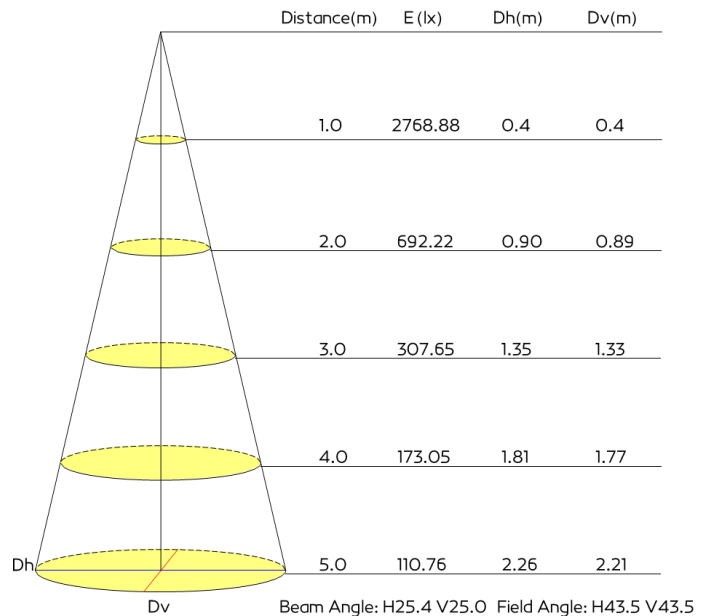




Code: T252 (WHT) / T253 (BLK)

Input Voltage	DC48
Power(Watts)	36x0.9W (33W)
Lumen	3022lm
Lamp holder	Aluminum PCB
Light Source	CREE XPE-2
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

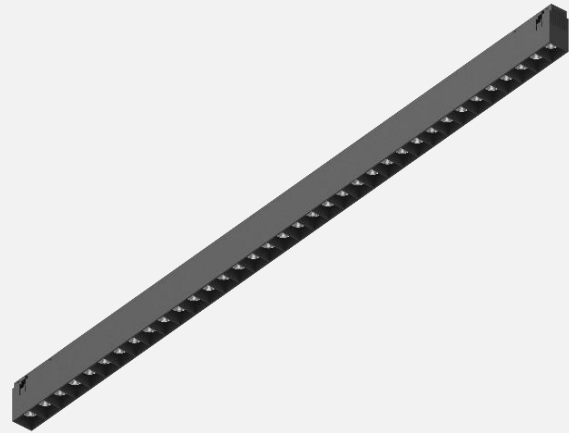


Optic Data

Luminous Intensity Distribution Curve

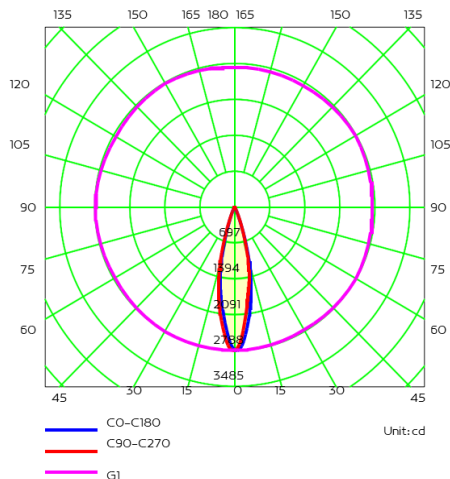


AAI Figure

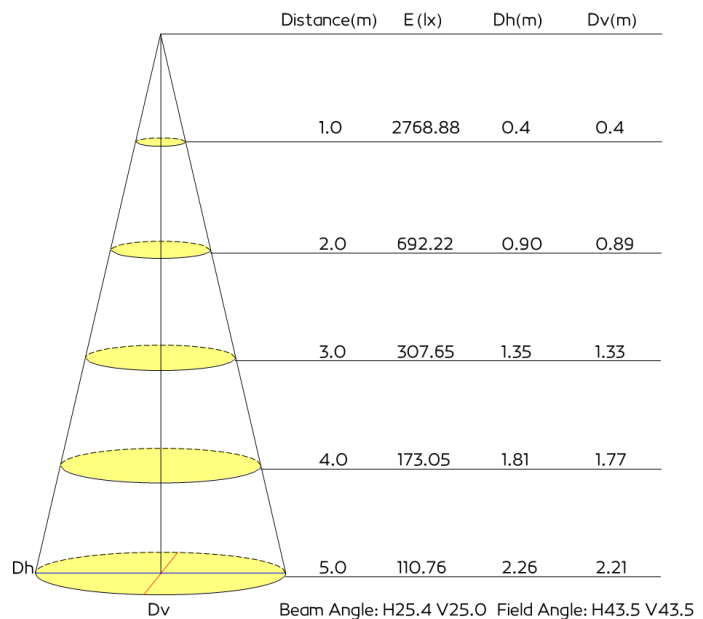




Code: T236 (WHT) / T237 (BLK)

Input Voltage	DC48
Power(Watts)	6x1.1W (7W)
Lumen	592lm
Lamp holder	Aluminum PCB
Light Source	CREE XPE-2
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□I □II ■III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS




Optic Data

Luminous Intensity Distribution Curve

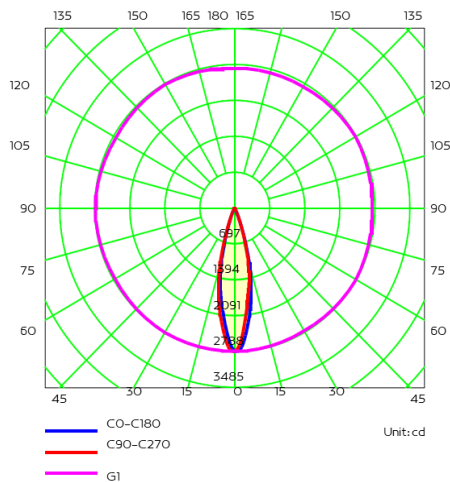


AAI Figure

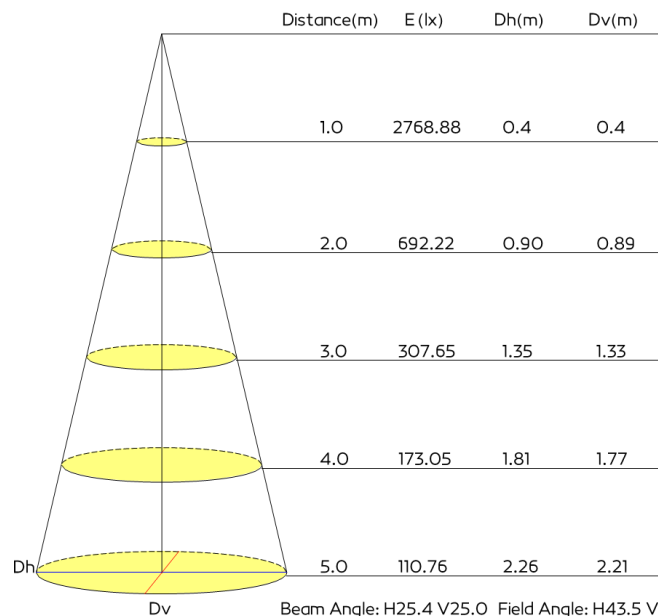




Code: T187 (BLK) / T263 (WHT)

Input Voltage	DC48 350MA
Power(Watts)	9x1.1W (10W)
Lumen	916.4lm
Lamp holder	Ceramic PCB
Light Source	CREE XPE-2
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□ I □ II ■ III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

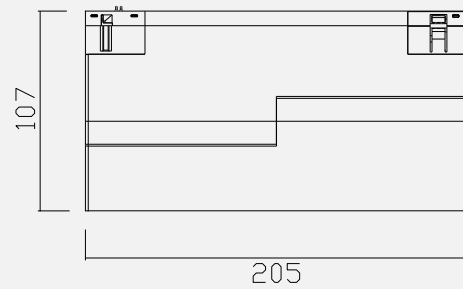


Optic Data

Luminous Intensity Distribution Curve

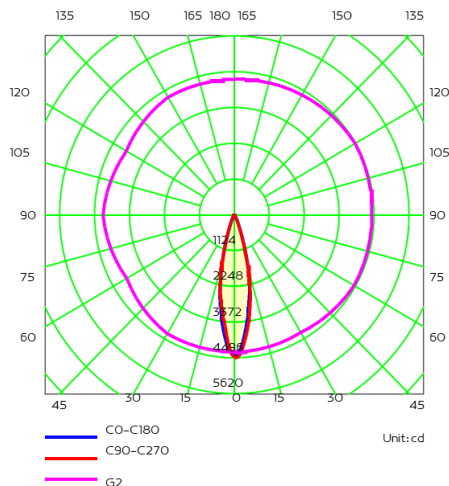


AAI Figure

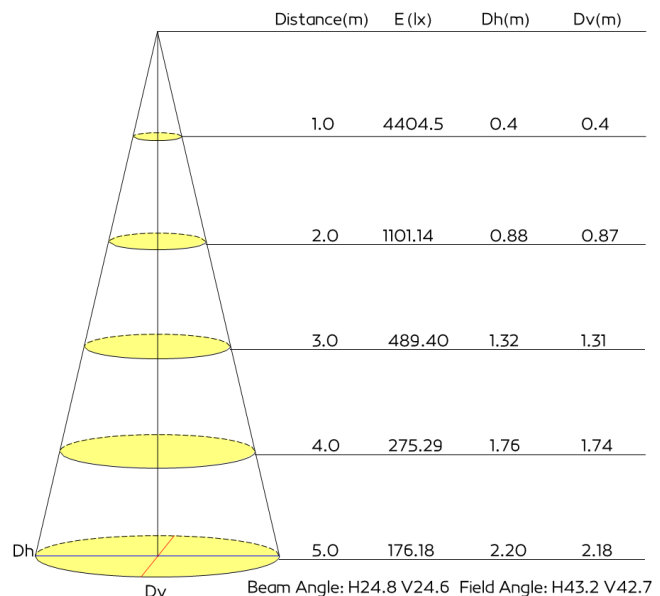




Code: T256 (WHT) / T257 (BLK)

Input Voltage	DC48 500MA
Power(Watts)	18W
Lumen	898.6lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	96°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

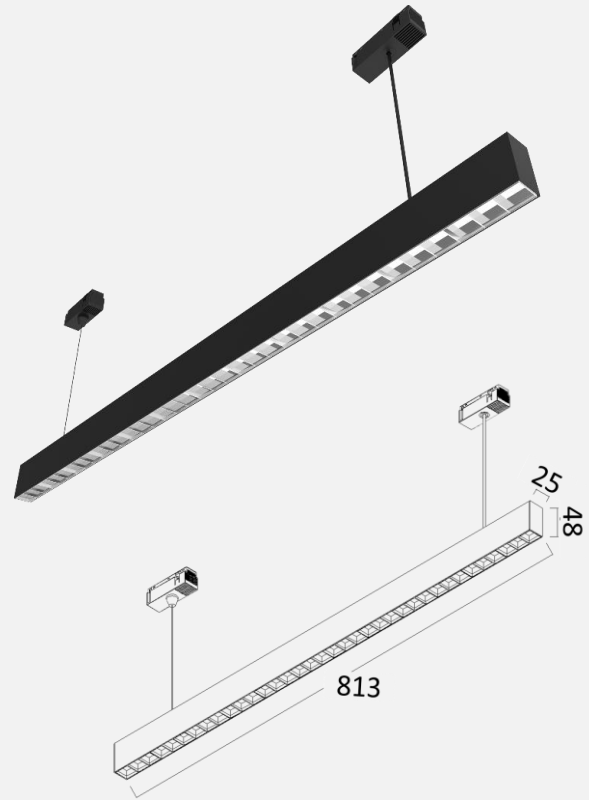


Optic Data

Luminous Intensity Distribution Curve

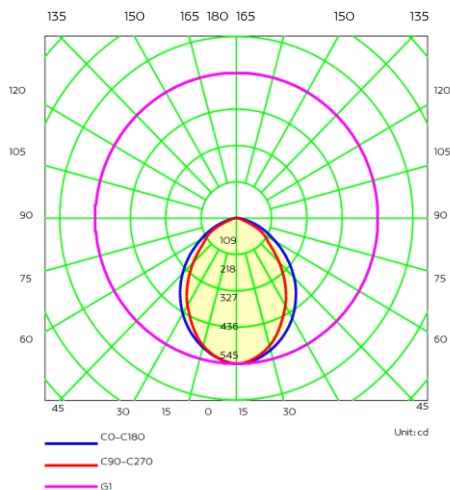

AAI Figure

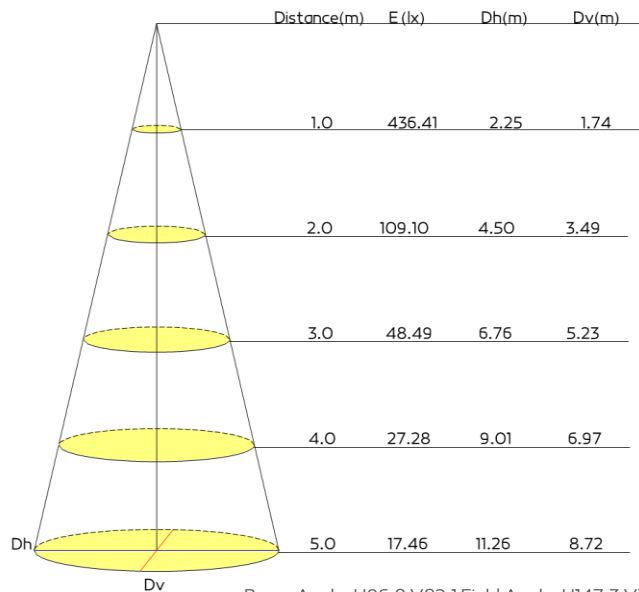


Beam Angle: H96.8 V82.1 Field Angle: H147.3 V136.8




Code: T258 (WHT) / T259 (BLK)

Input Voltage	DC48
Power(Watts)	99x0.5W (49W)
Lumen	2886lm
Lamp holder	Ceramic PCB
Light Source	CREE 3030 (99pcs)
Beam Angle	30°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	□ I □ II ■ III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

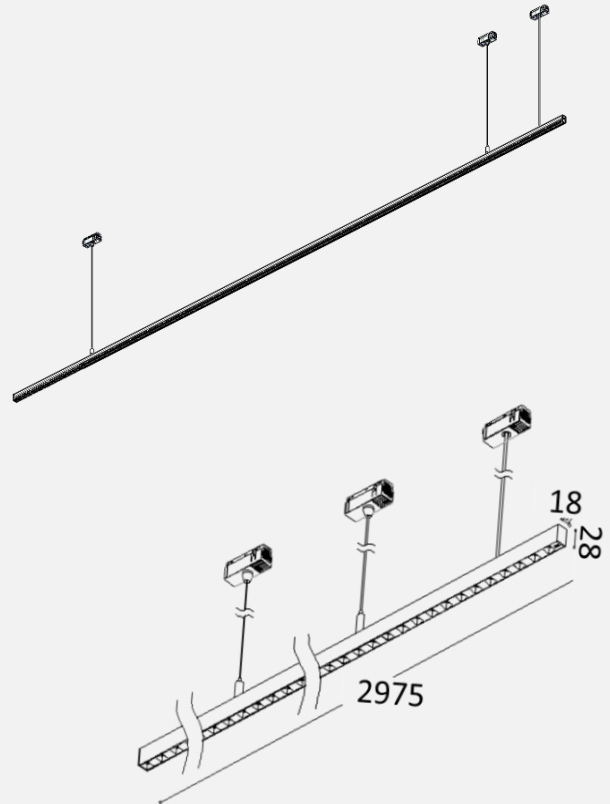


Optic Data

Luminous Intensity Distribution Curve

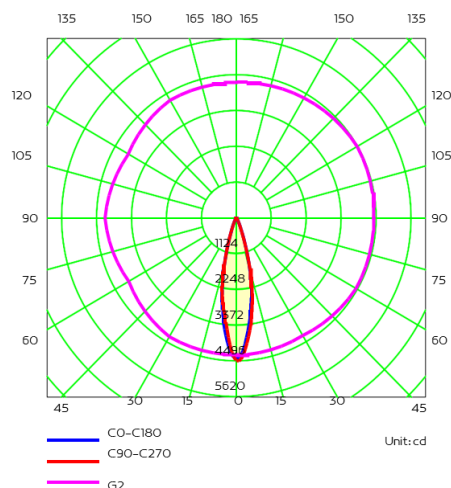


AAI Figure

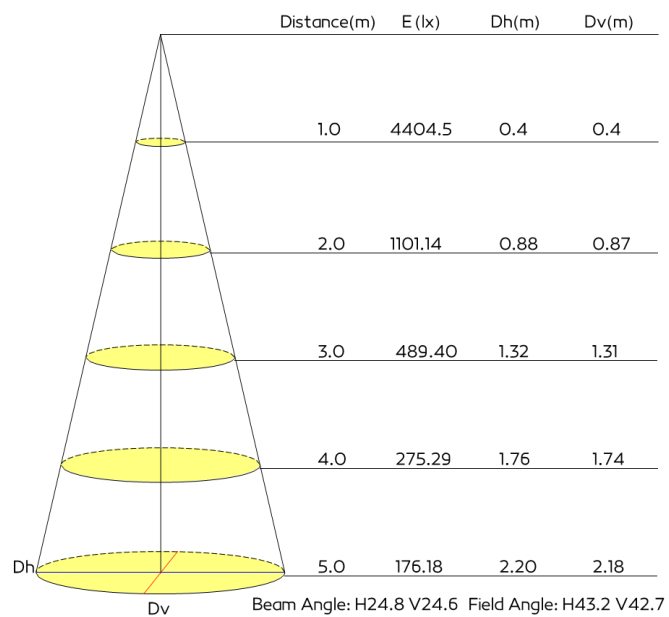




Code: T240 (WHT) / T241 (BLK)

Input Voltage	DC48 700MA
Power(Watts)	20W
Lumen	1397.6lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	110°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Body color	WHT / BLK
Wire connection way	Track Adaptor
Class	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
Guarantee	3 years
Warranty	5 years
Certificates	CE , ROHS

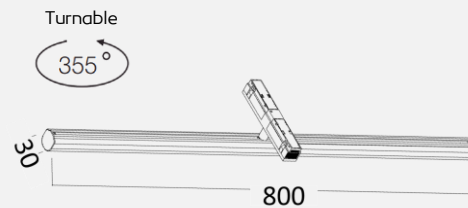


Optic Data

Luminous Intensity Distribution Curve

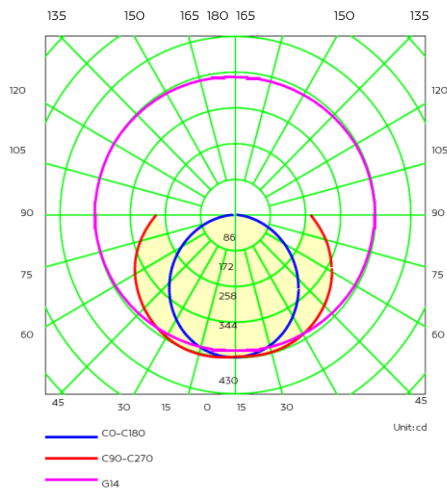

AAI Figure

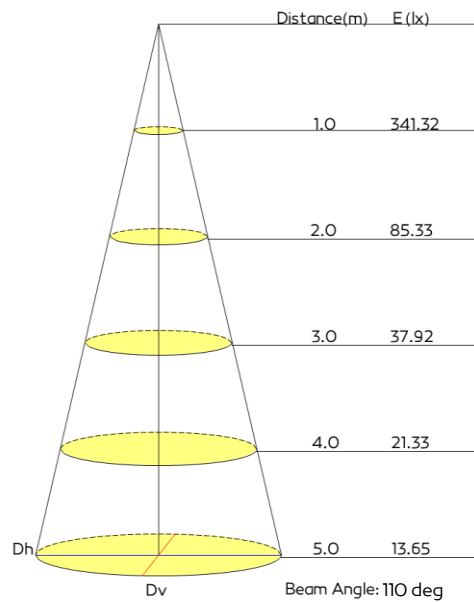



Code: T13

Included: 6xT130 + 3xT131 + 6x 600mm Track + 6x 120° connector

Code: T130





Input Voltage	DC48 500MA
Power(Watts)	18.5W
Lumen	1890lm
Lamp holder	Ceramic PCB
Light Source	CREE CXB1512
Beam Angle	30°

Code: T131




Input Voltage	DC48 350MA
Power(Watts)	10.2W
Lumen	783lm
Lamp holder	Aluminum PCB
Light Source	Bridgelux 2835
Beam Angle	110°

Color Temperature	3000K
CRI ≥	80
IP level	20
Main Material	Aluminum
Body color	BLK
Installation Type	Pendant , Ceiling
Guarantee	3 years
Warranty	5 years

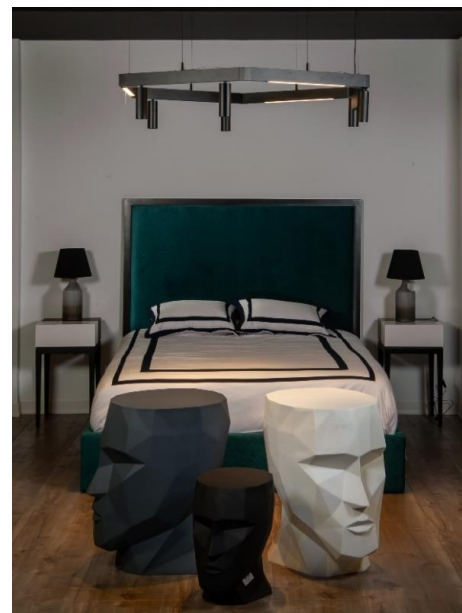
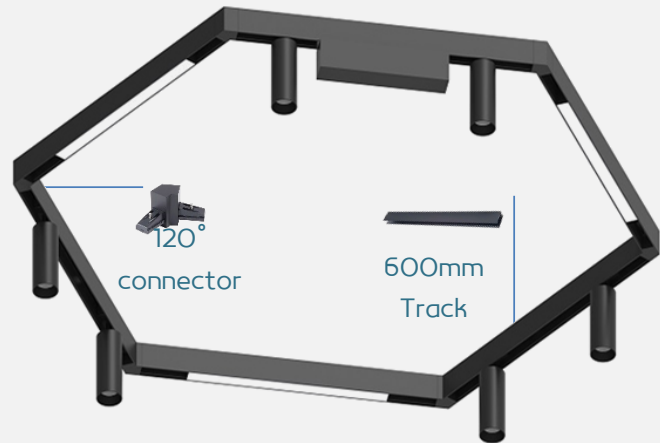


Details



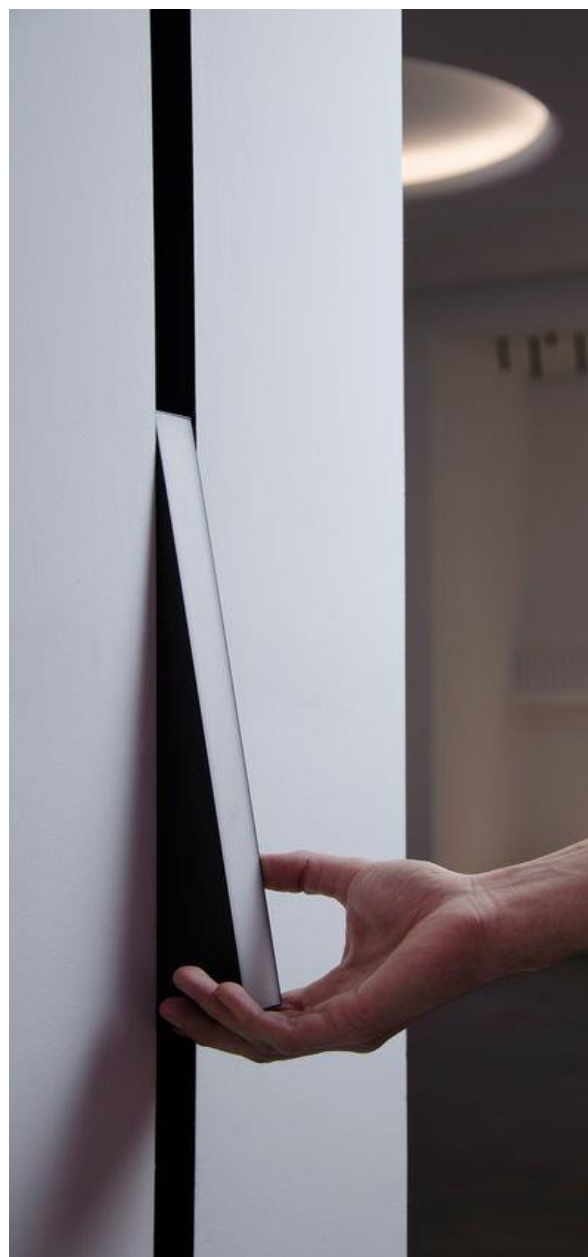

Magnetic Brass Multi Track Light

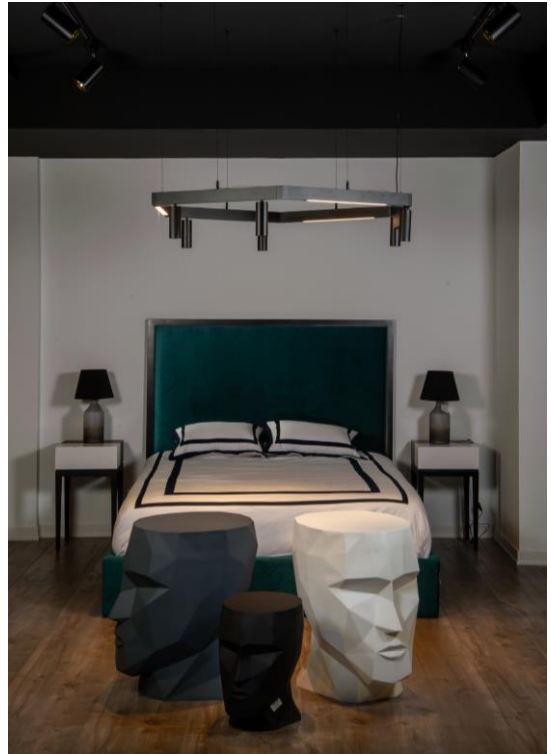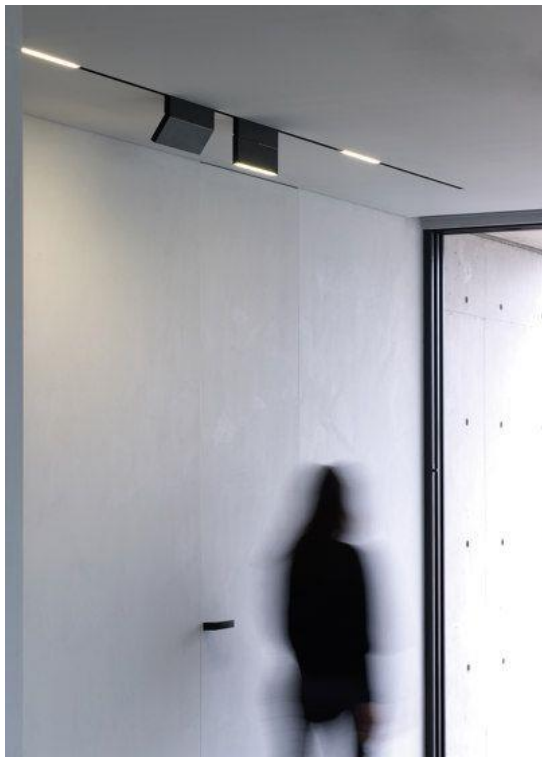

Magnetic Brass Multi Track Light



نوران
NOORAN